

HDA + AMP 300 ohm

HDA + AMP 300 ohm with CASE


RightMark Audio Analyzer test

Testing chain: External loopback (line-out - line-in)
Sampling mode: 16-bit, 96 kHz


Summary

Test	HDA + AMP 300 ohm	HDA + AMP 300 ohm with CASE
Frequency response (from 40 Hz to 15 kHz), dB:	+0.03, -0.22	-0.48, -0.72
Noise level, dB (A):	-85.1	-83.6
Dynamic range, dB (A):	85.1	83.5
THD, %:	0.0065	0.0076
IMD + Noise, %:	0.024	0.025
Stereo crosstalk, dB:	-62.8	-59.9


Frequency response

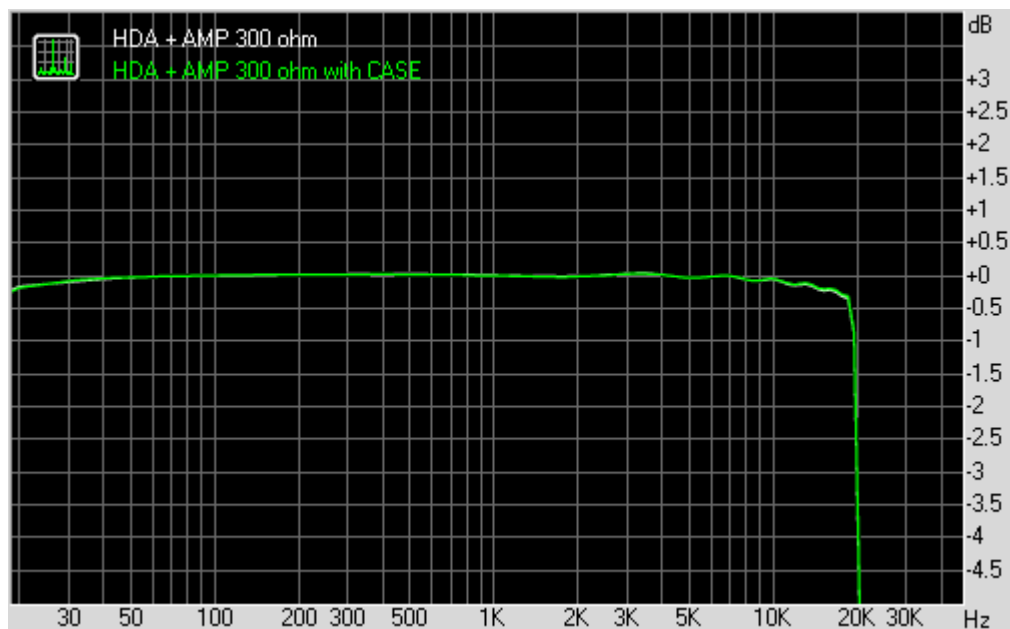


Noise level

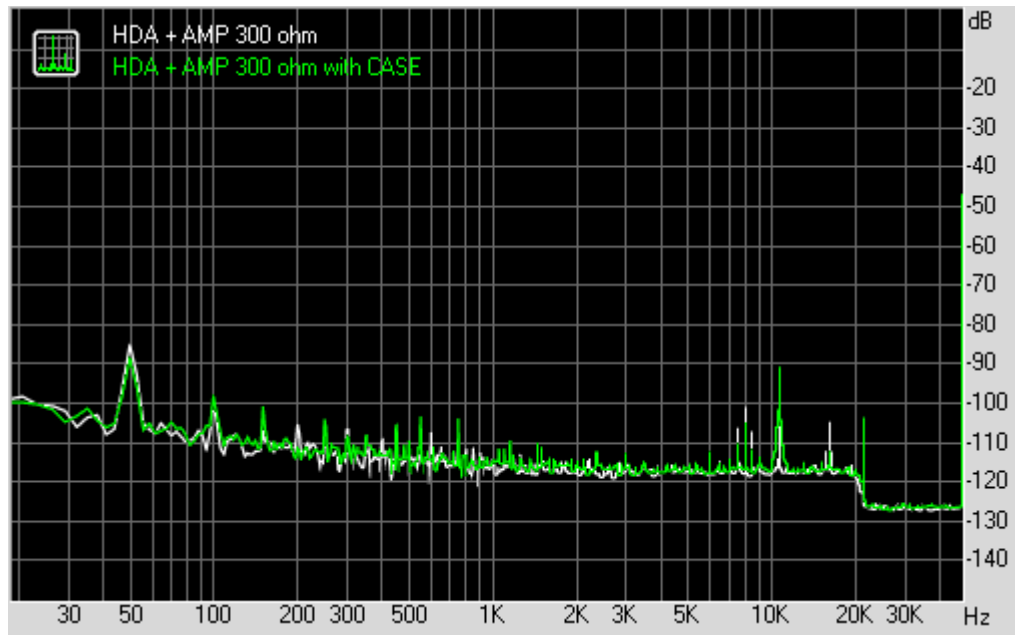


Dynamic range

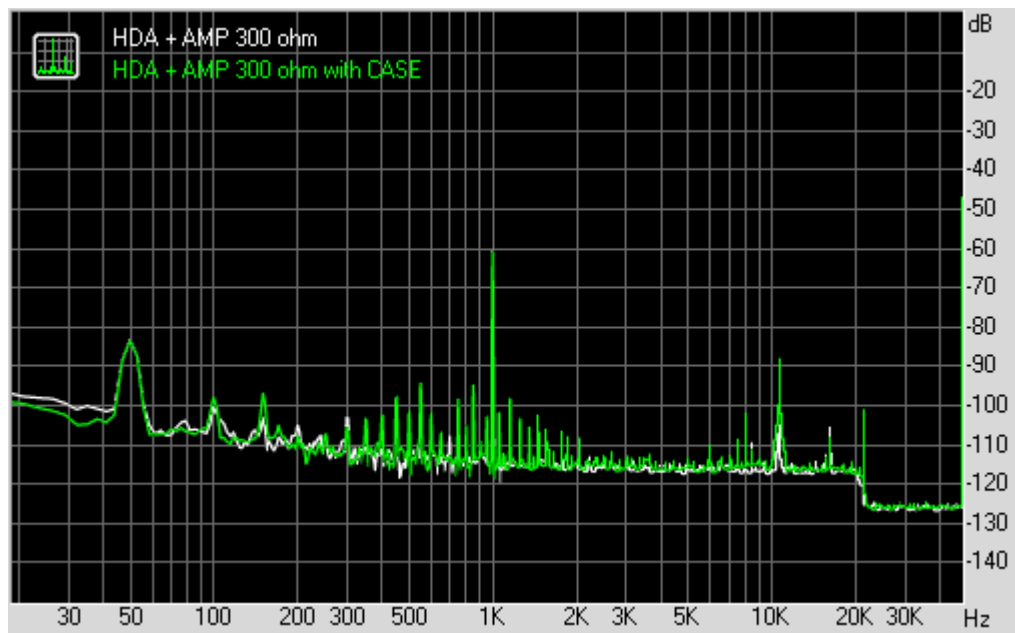


THD + Noise (at -3 dB FS)

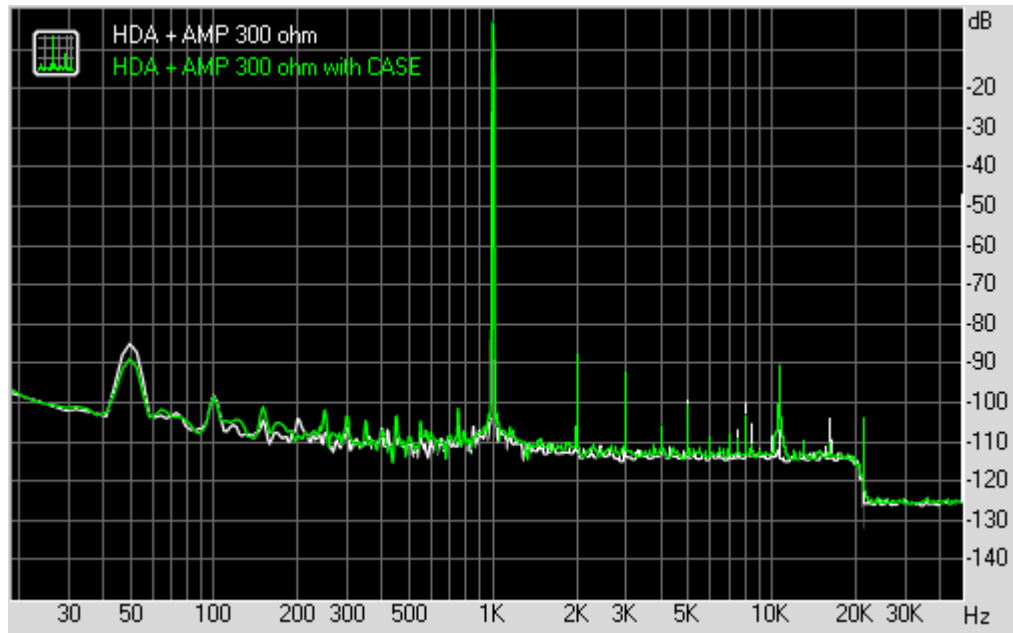

Intermodulation distortion

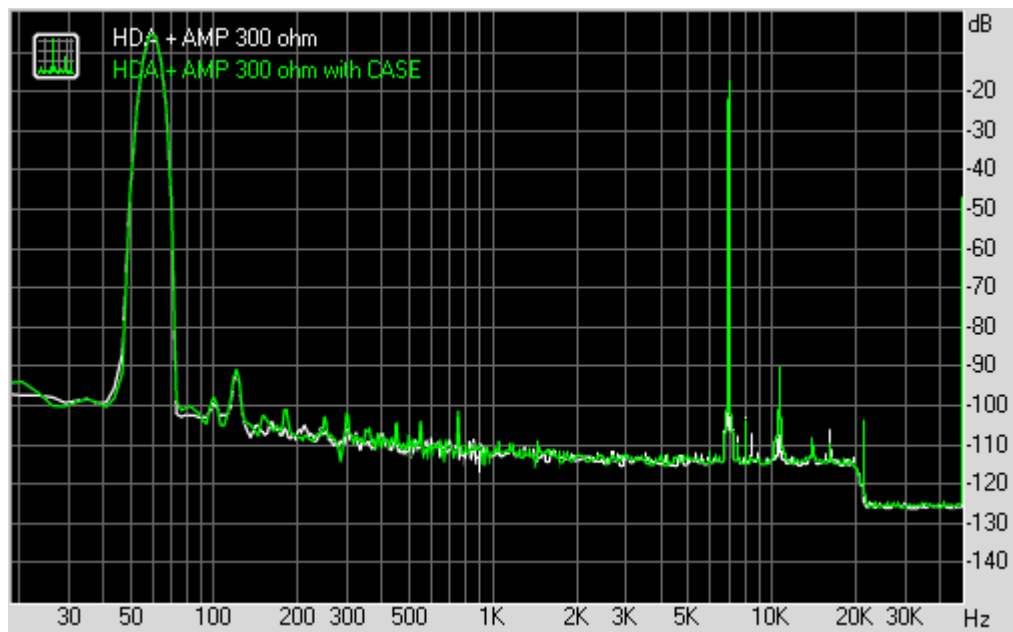

Stereo crosstalk

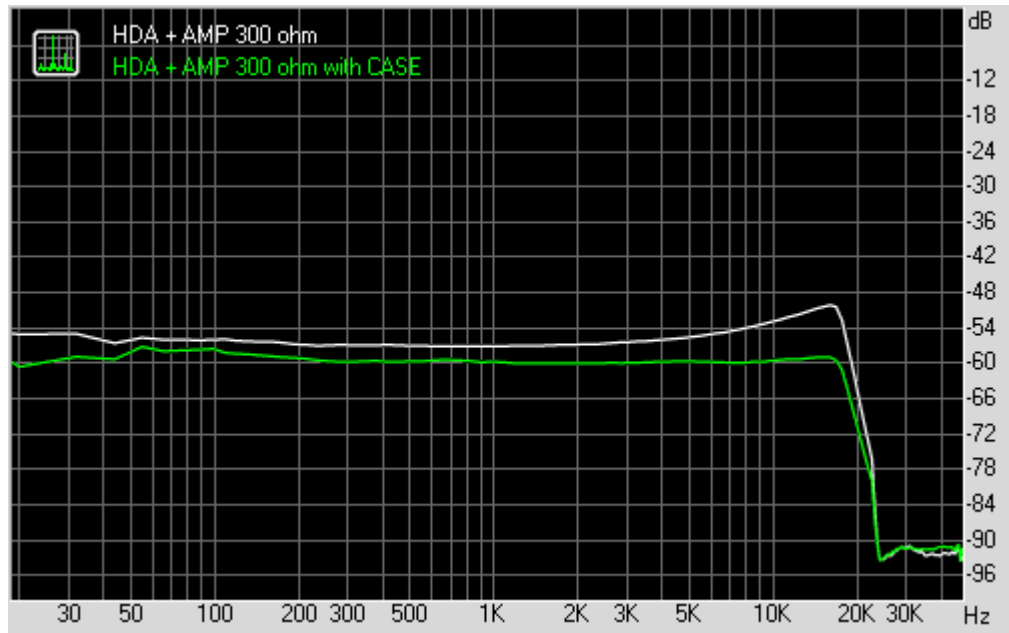

This report was generated by RightMark Audio Analyzer 6.0