

Applicable Serial No. 800,001 to 810,000 (USA Model only)




USA Model	810,001 and later
Canada Model	700,001 and later

USA Model	510,001 and later
Canada Model	700,001 and later





- Audio Amplifier Section -

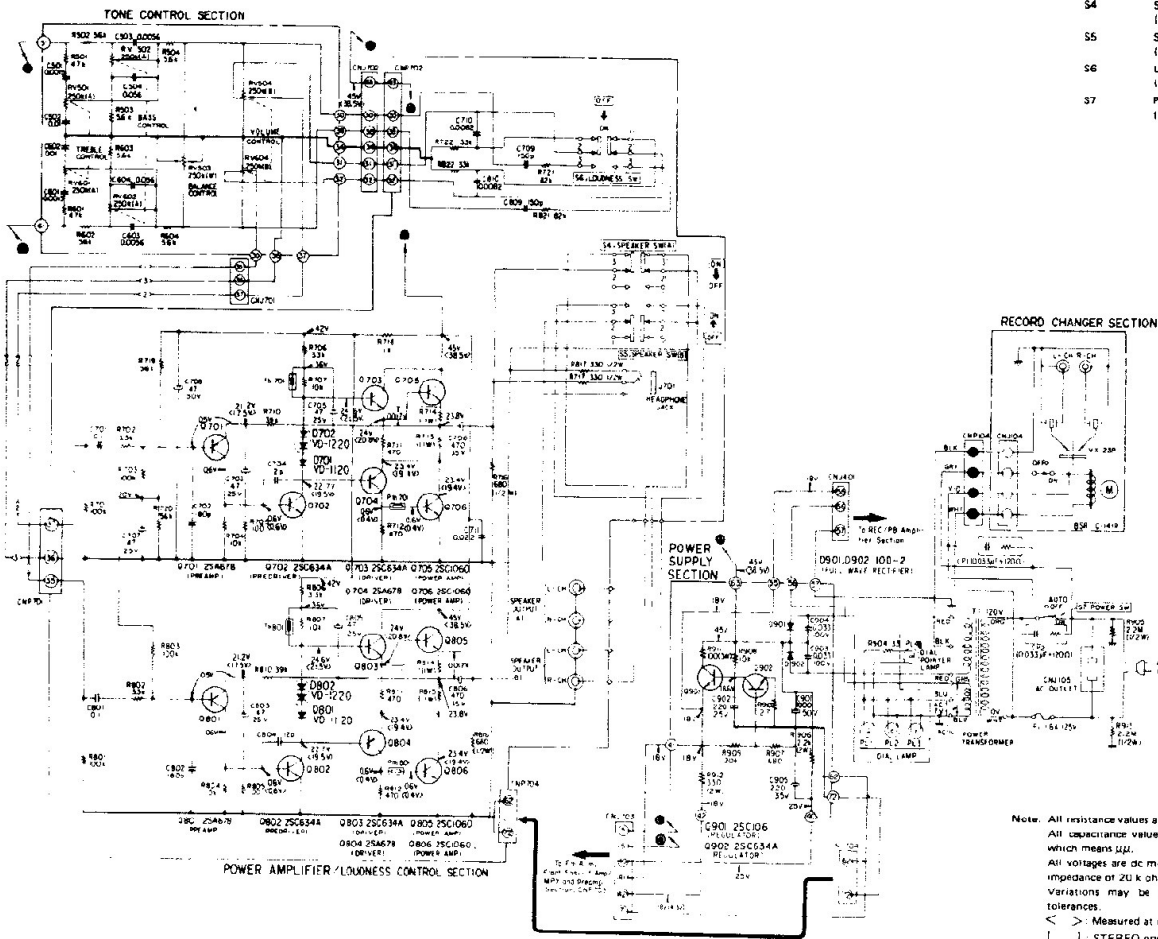

Ref. No.	Description	Position
S4	SPEAKER SW (A) (ON - OFF)	ON
S5	SPEAKER SW (B) (ON - OFF)	OFF
S6	LOUDNESS SW (ON - OFF)	OFF
S7	POWER SW (ON - OFF)	ON

Note: All resistance values are in ohms, k = 1,000, M = 1,000 k.
All capacitance values are in μ F except as indicated with p, which means pF.
All voltages are dc measured with a VOM which has an input impedance of 20 k ohms/volt. No signal in.
Variations may be noted because of normal production tolerances.
< > : Measured at rated output
| : STEREO operation

- REC/PB Amp Section -

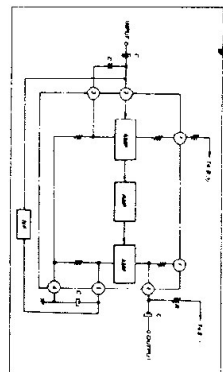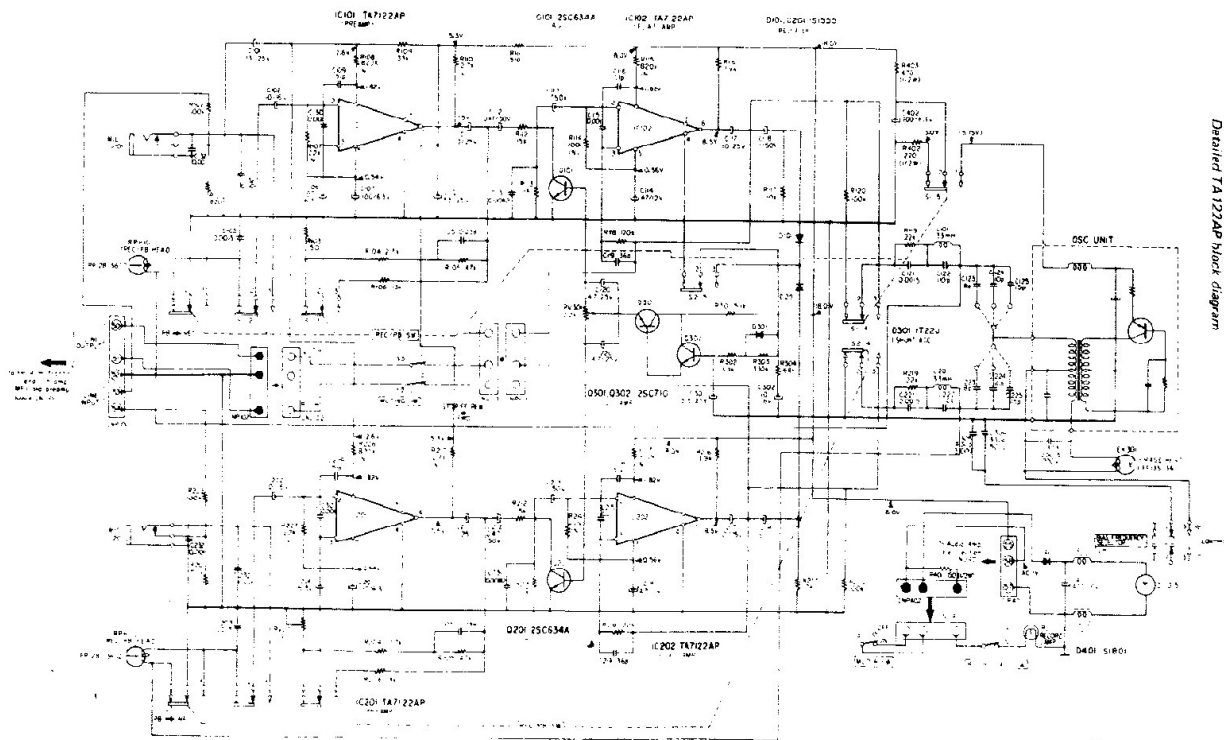

Ref. No.	Description	Position	Ref. No.	Description	Position
S1, S2	REC/PB SW (REC-PB)	PB	S4	MOTOR SW (ON-OFF)	ON
S3	MUTING SW (FWD-STOP, LL, RLW)	FWD	S5	RECORD LAMP SW (ON-OFF)	ON