
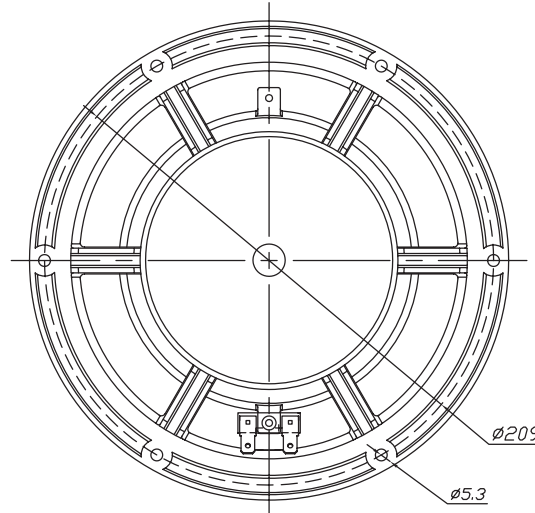


RS225-8

8" Reference Woofer

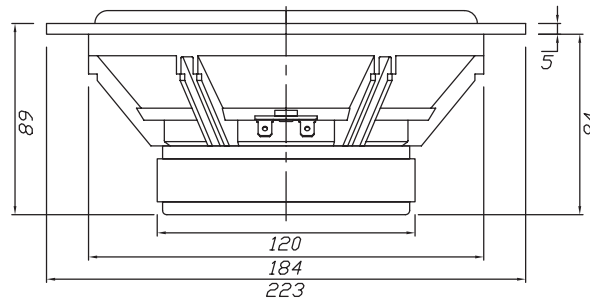


Parameters

Impedance (Ω)	8
Re (Ω)	6.53
Le (mH) @ 1 kHz	0.86
Fs (Hz)	28
Qms	1.46
Qes	0.51
Qts	0.38
Mms (g)	35.8
Cms (mm/N)	0.88
Sd (cm ²)	213.8
Vd (cm ³)	149.7
BL (Tm)	9.05
VAS (liters)	56.8
XMAX (mm)	7
VC Diameter (mm)	38
SPL (dB 2.83V/1m)	88.8
RMS Power Handling (W)	80
Usable Frequency Range (Hz)	28-2,400

Features

- Lightweight black anodized aluminum cone
- Attractive 6-hole cast frame
- Advanced low distortion motor design
- Solid aluminum phase plug
- Rubber surround


Frequency Response

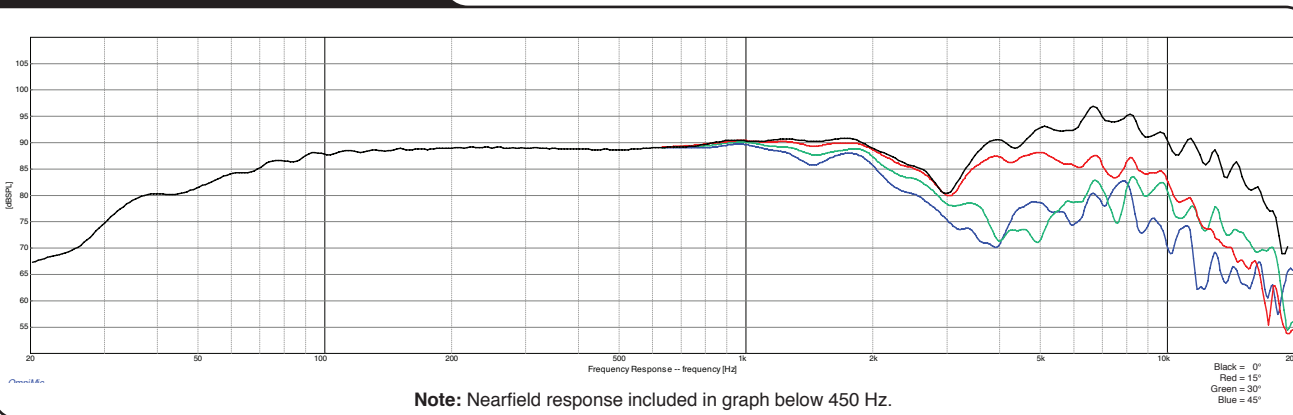

Note: All dimensions in mm.

daytonaudio.com

Impedance/Phase

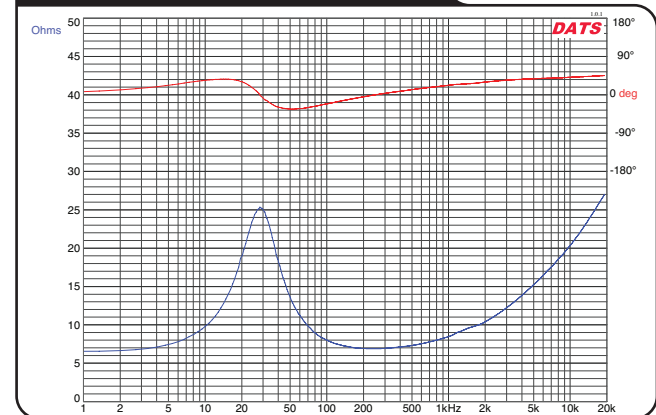

© Dayton Audio Last Revised: 8/17/2014