

Rectifier diode

1SR154-400

●Applications

General purpose rectification


●Features

- 1) Small power mold type. (PMDS)
- 2) High reliability.


●Construction

Silicon diffused junction


●External dimensions (Unit : mm)

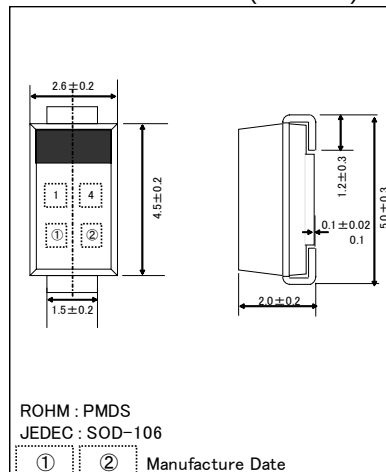


●Land size figure (Unit : mm)



●Structure



●Taping dimensions (Unit : mm)

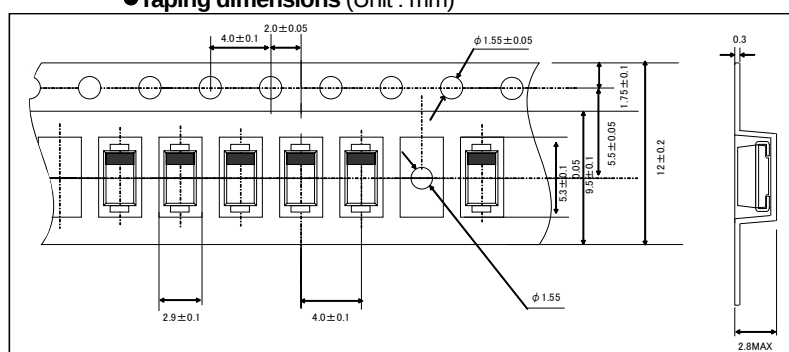

●Absolute maximum ratings (Ta=25°C)





Parameter	Symbol	Limits	Unit
Reverse voltage (non-repetitive peak)	V_{RMS}	500	V
Reverse voltage (repetitive peak)	V_R	400	V
Average rectified forward current	I_o	1	A
Forward current surge peak (60Hz·1cyc)	I_{FSM}	30	A
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-55 to +150	°C

●Electrical characteristics (Ta=25°C)


Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Forward voltage	V_F	-	-	1.1	V	$I_F=1A$
Reverse current	I_R	-	-	10	uA	$V_R=400V$

Diodes


●Electrical characteristic curves (Ta=25°C)

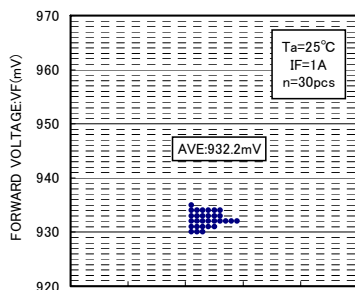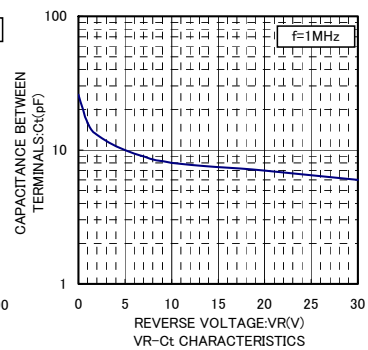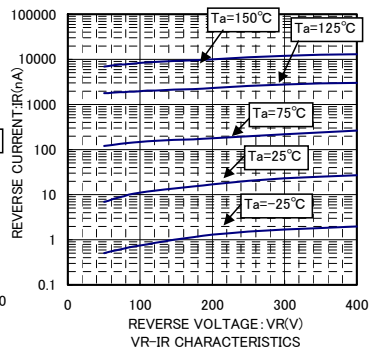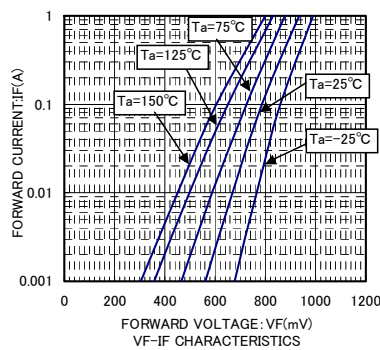


VF DISPERSION MAP




IR DISPERSION MAP

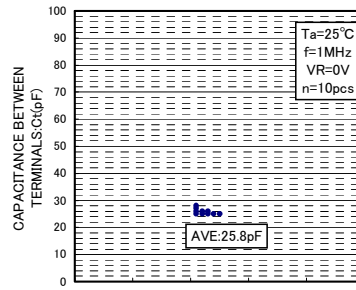





Ct DISPERSION MAP

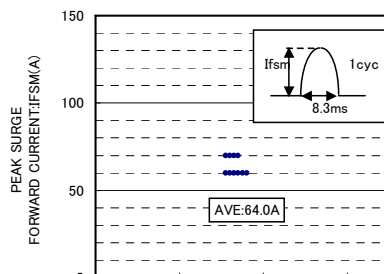

IFSM DISERSION MAP



trr DISPERSION MAP

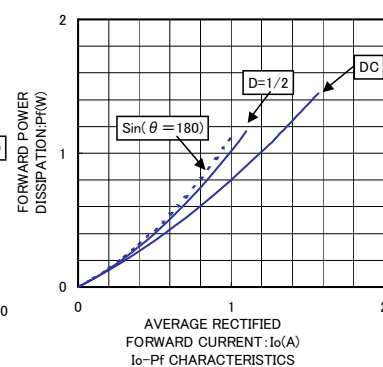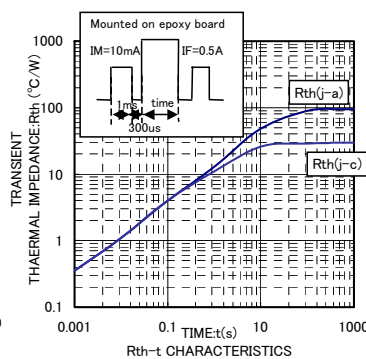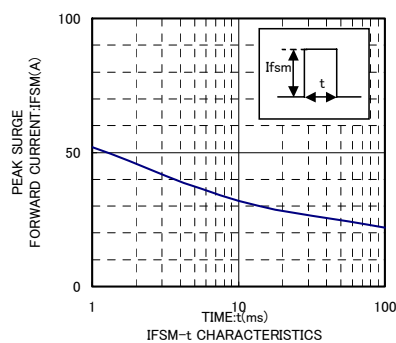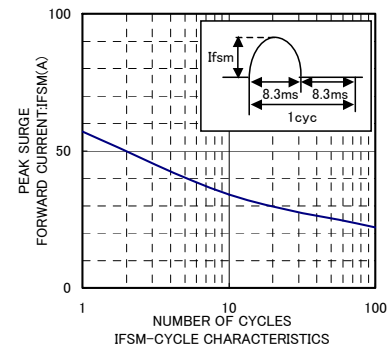

Diodes

