



Service Manual

H-CMD4000

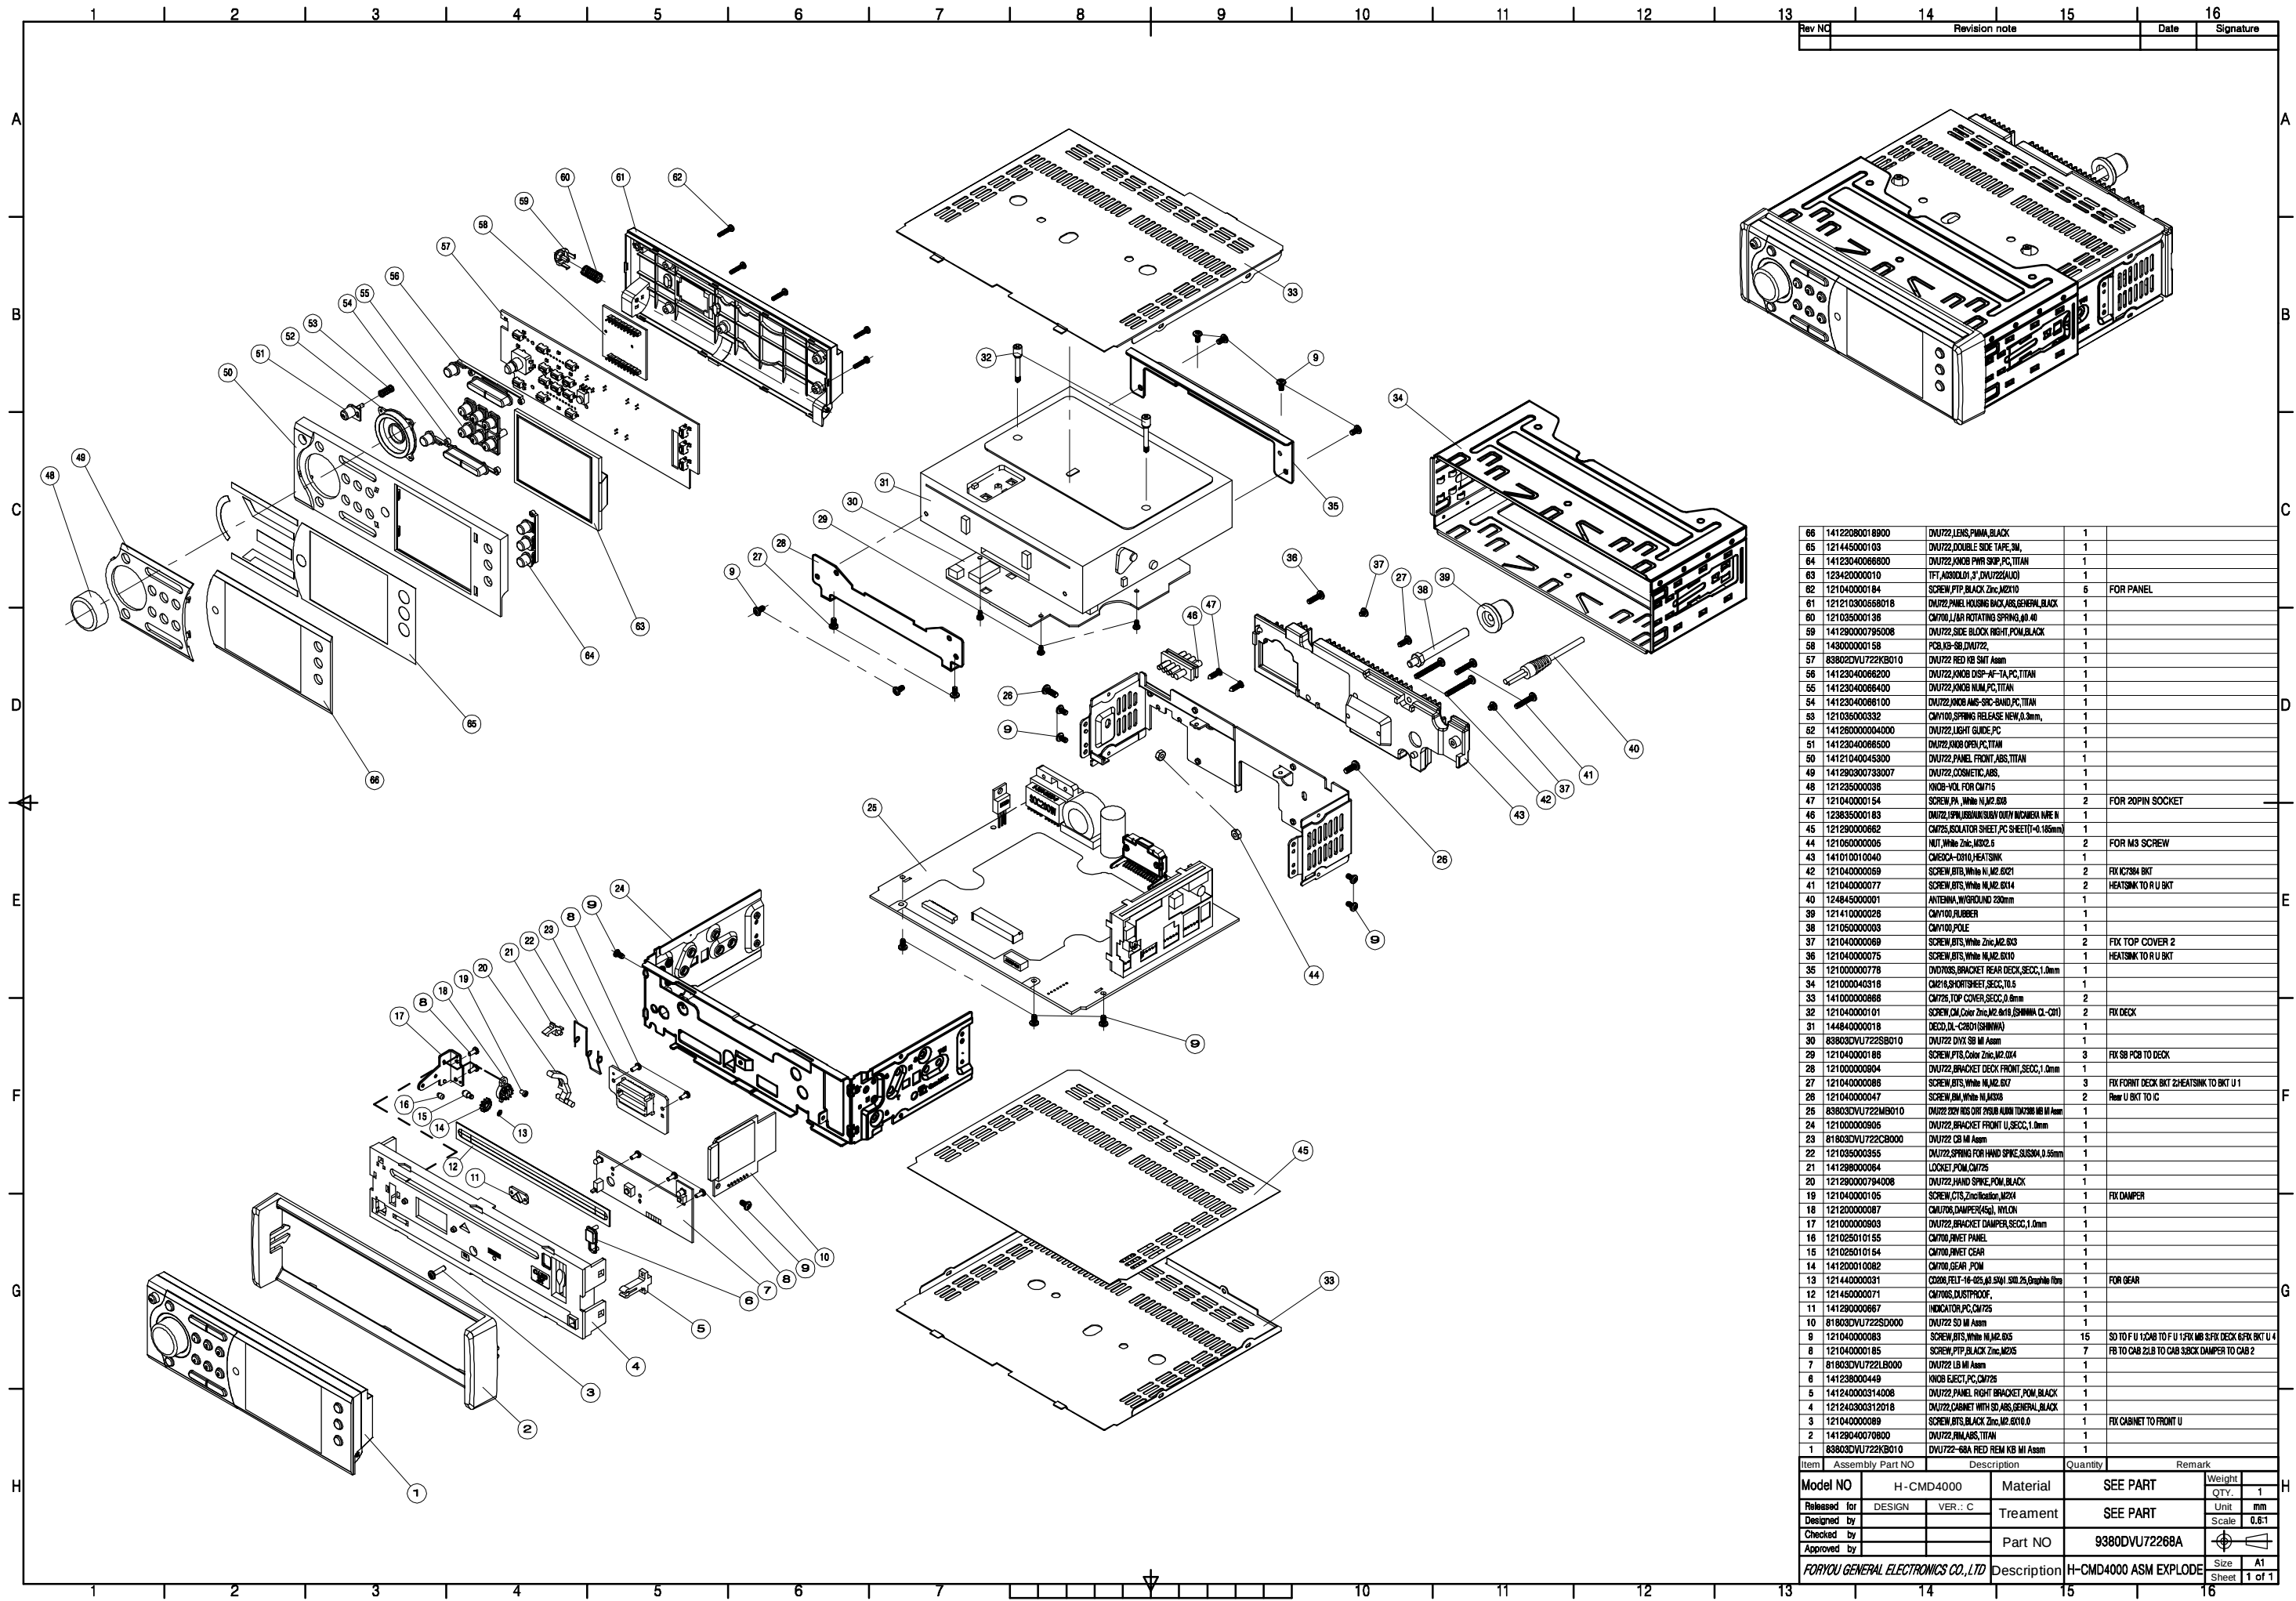

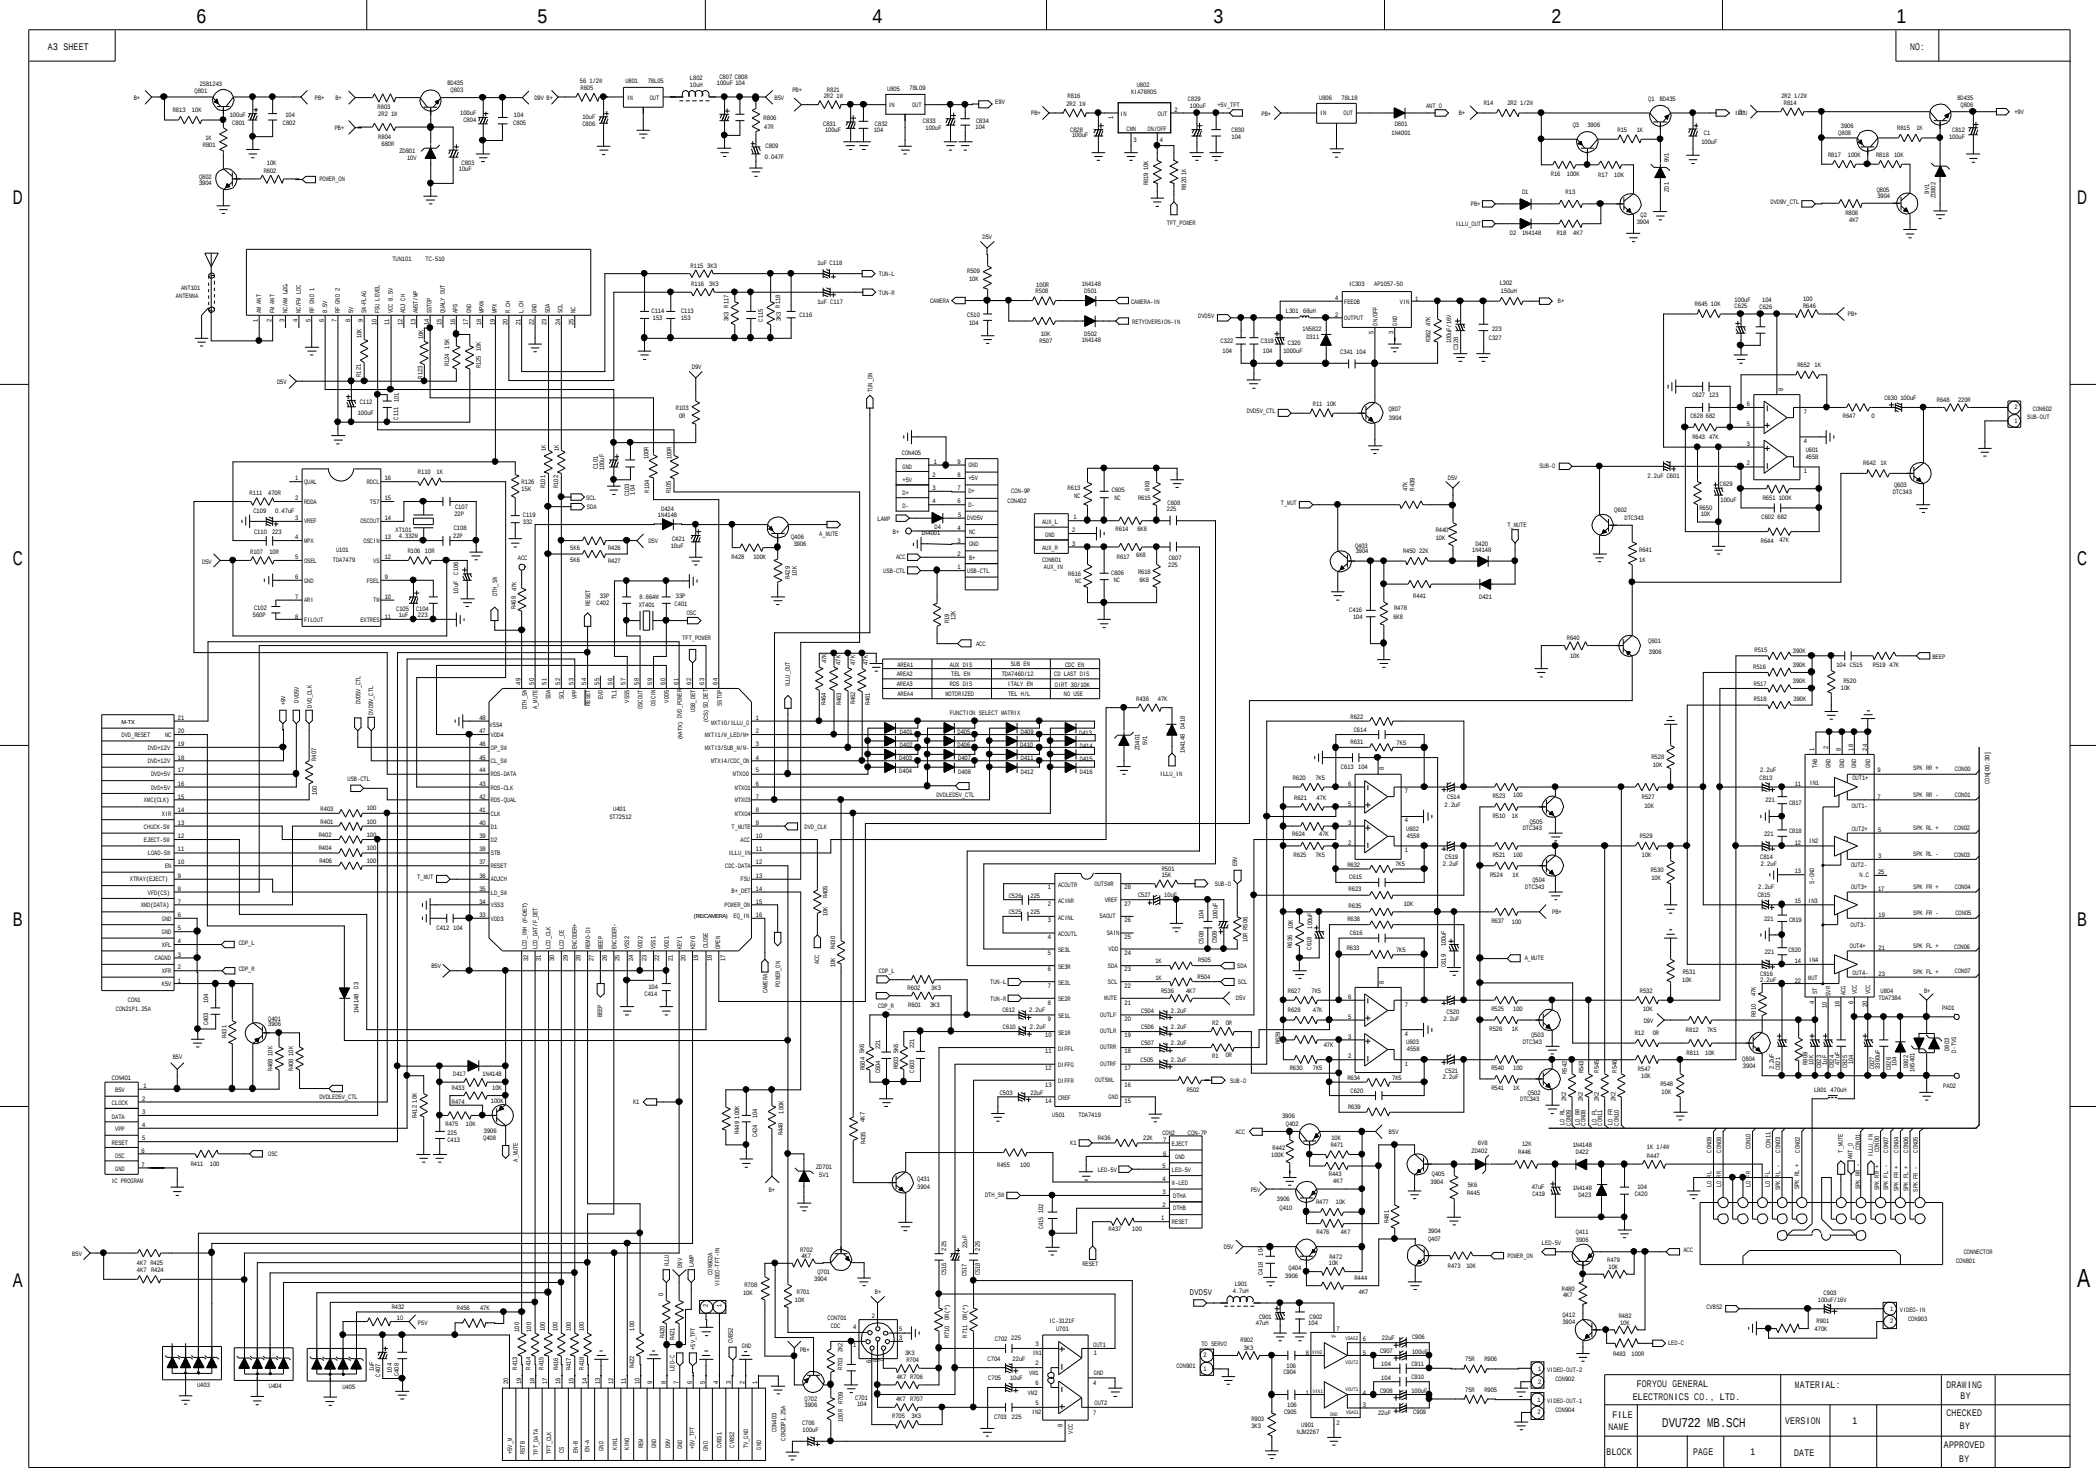

6

5

4

3

2

1

D

D

C


C

B


B

A

A

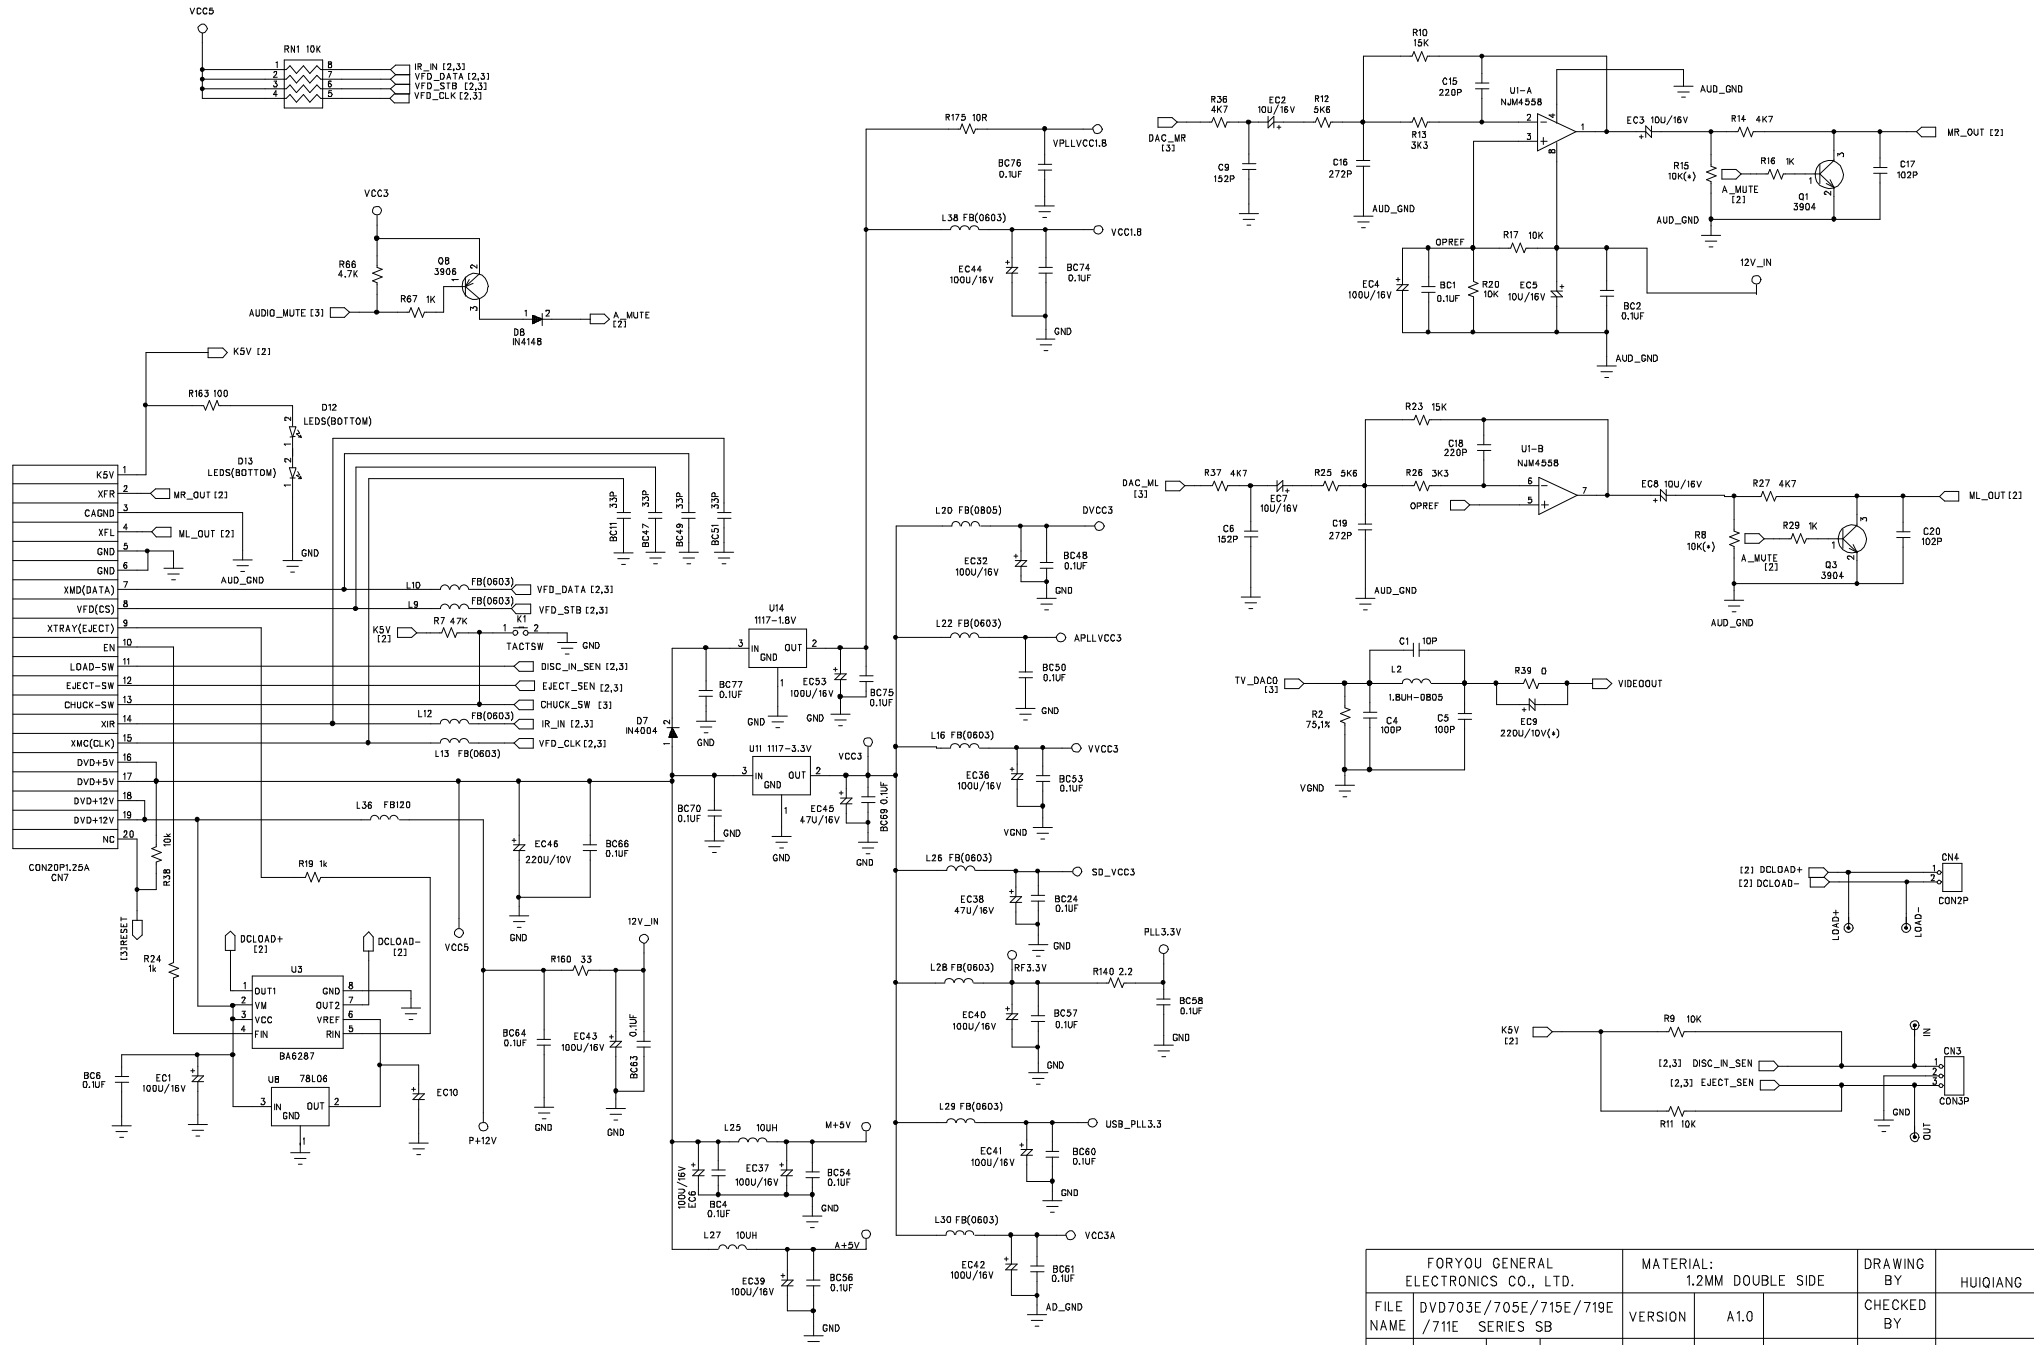

FORYOU GENERAL ELECTRONICS CO., LTD.			MATERIAL: 1.2MM DOUBLE SIDE		DRAWING BY	HUIQIANG
FILE NAME	DVD703E/705E/715E/719E /711E SERIES SB	VERSION	A1.0	CHECKED BY		
BLOCK	PAGE	1/3	DATE	APPROVED BY		

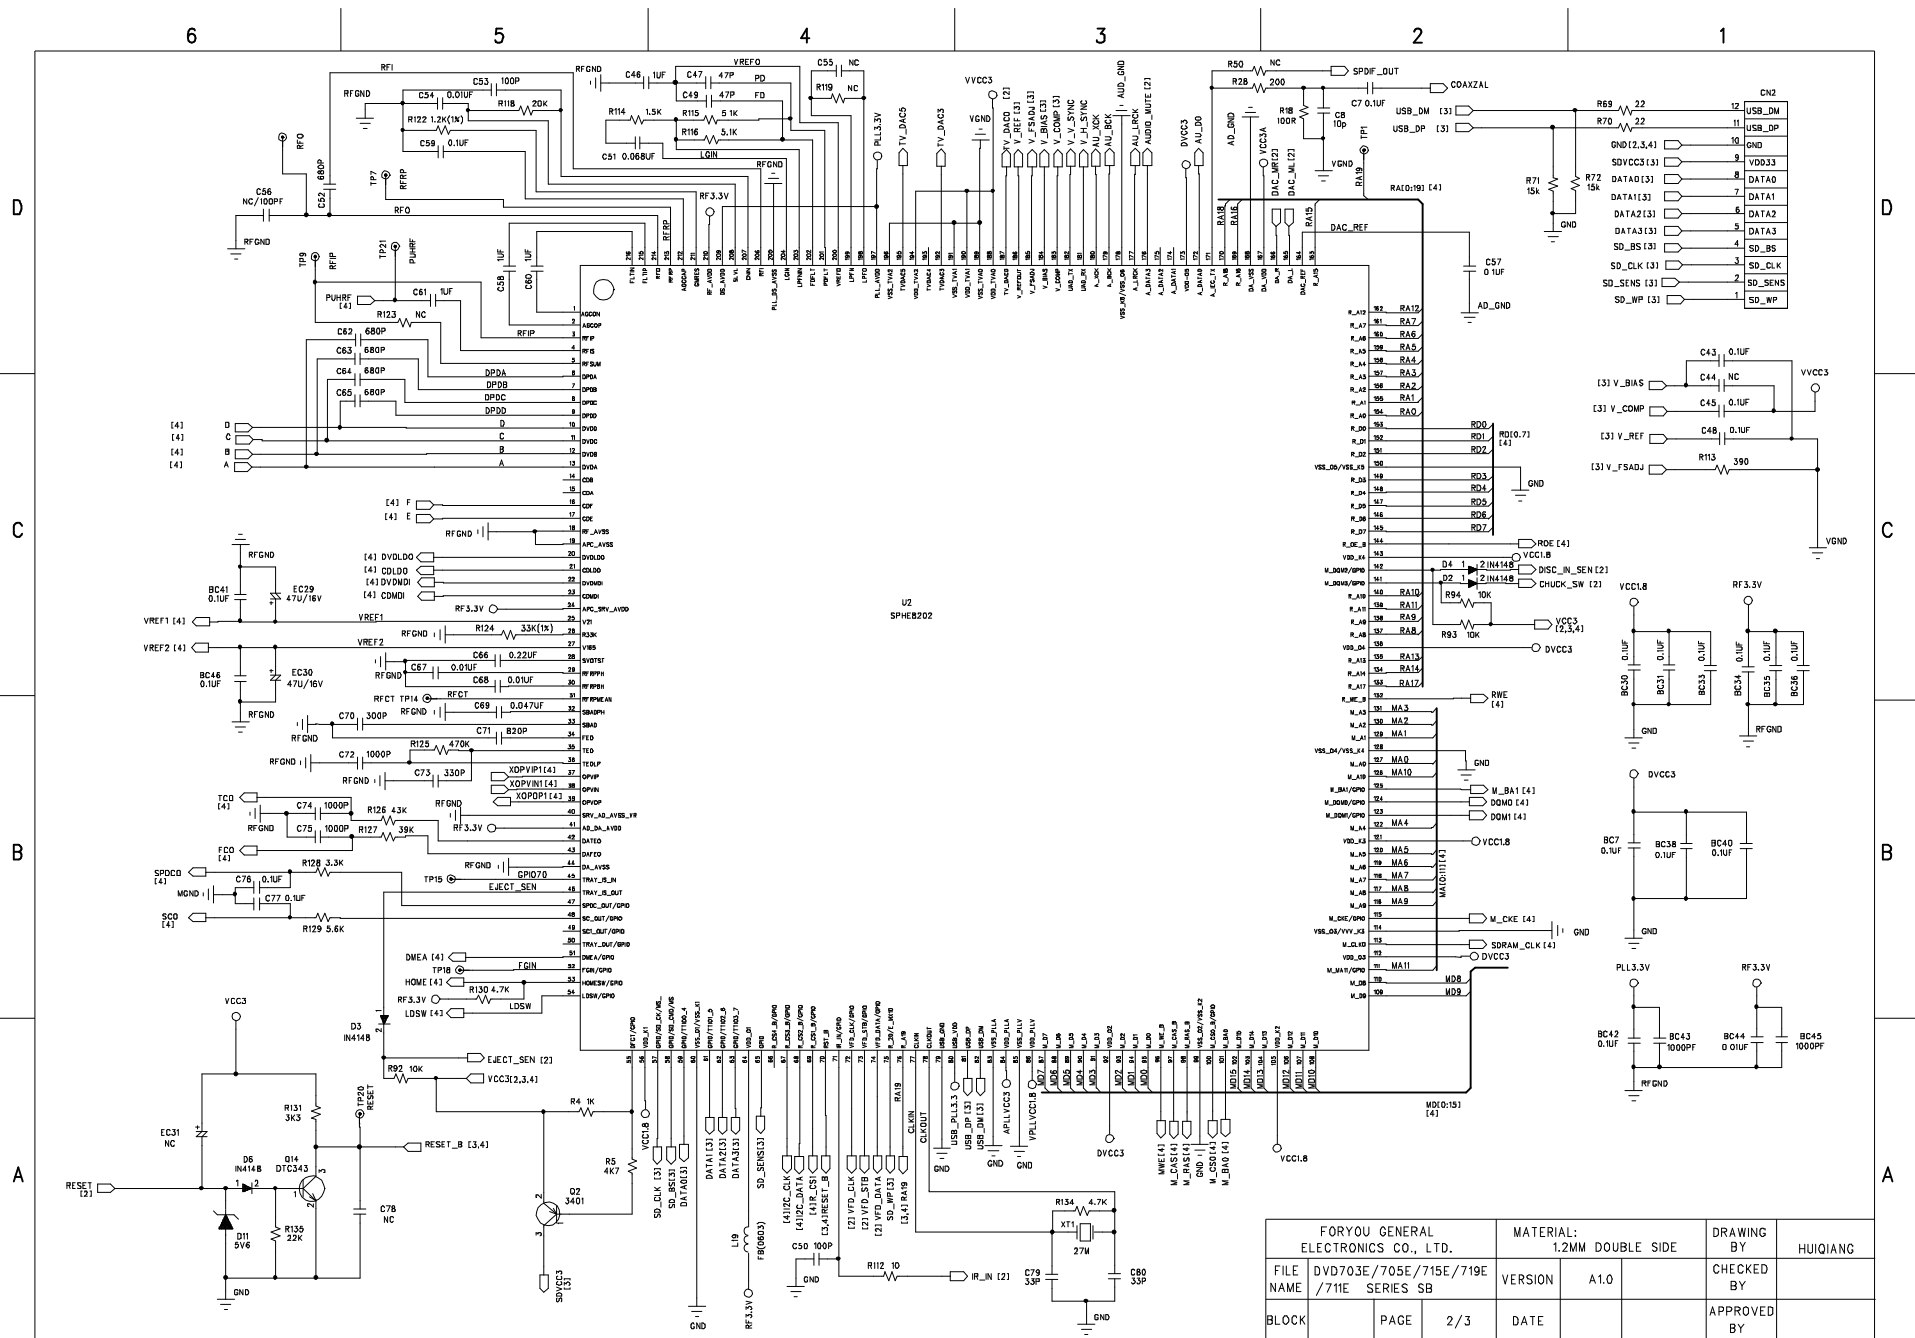

6

5

4

3

2

1

D

C

B


A

D


C

B

A

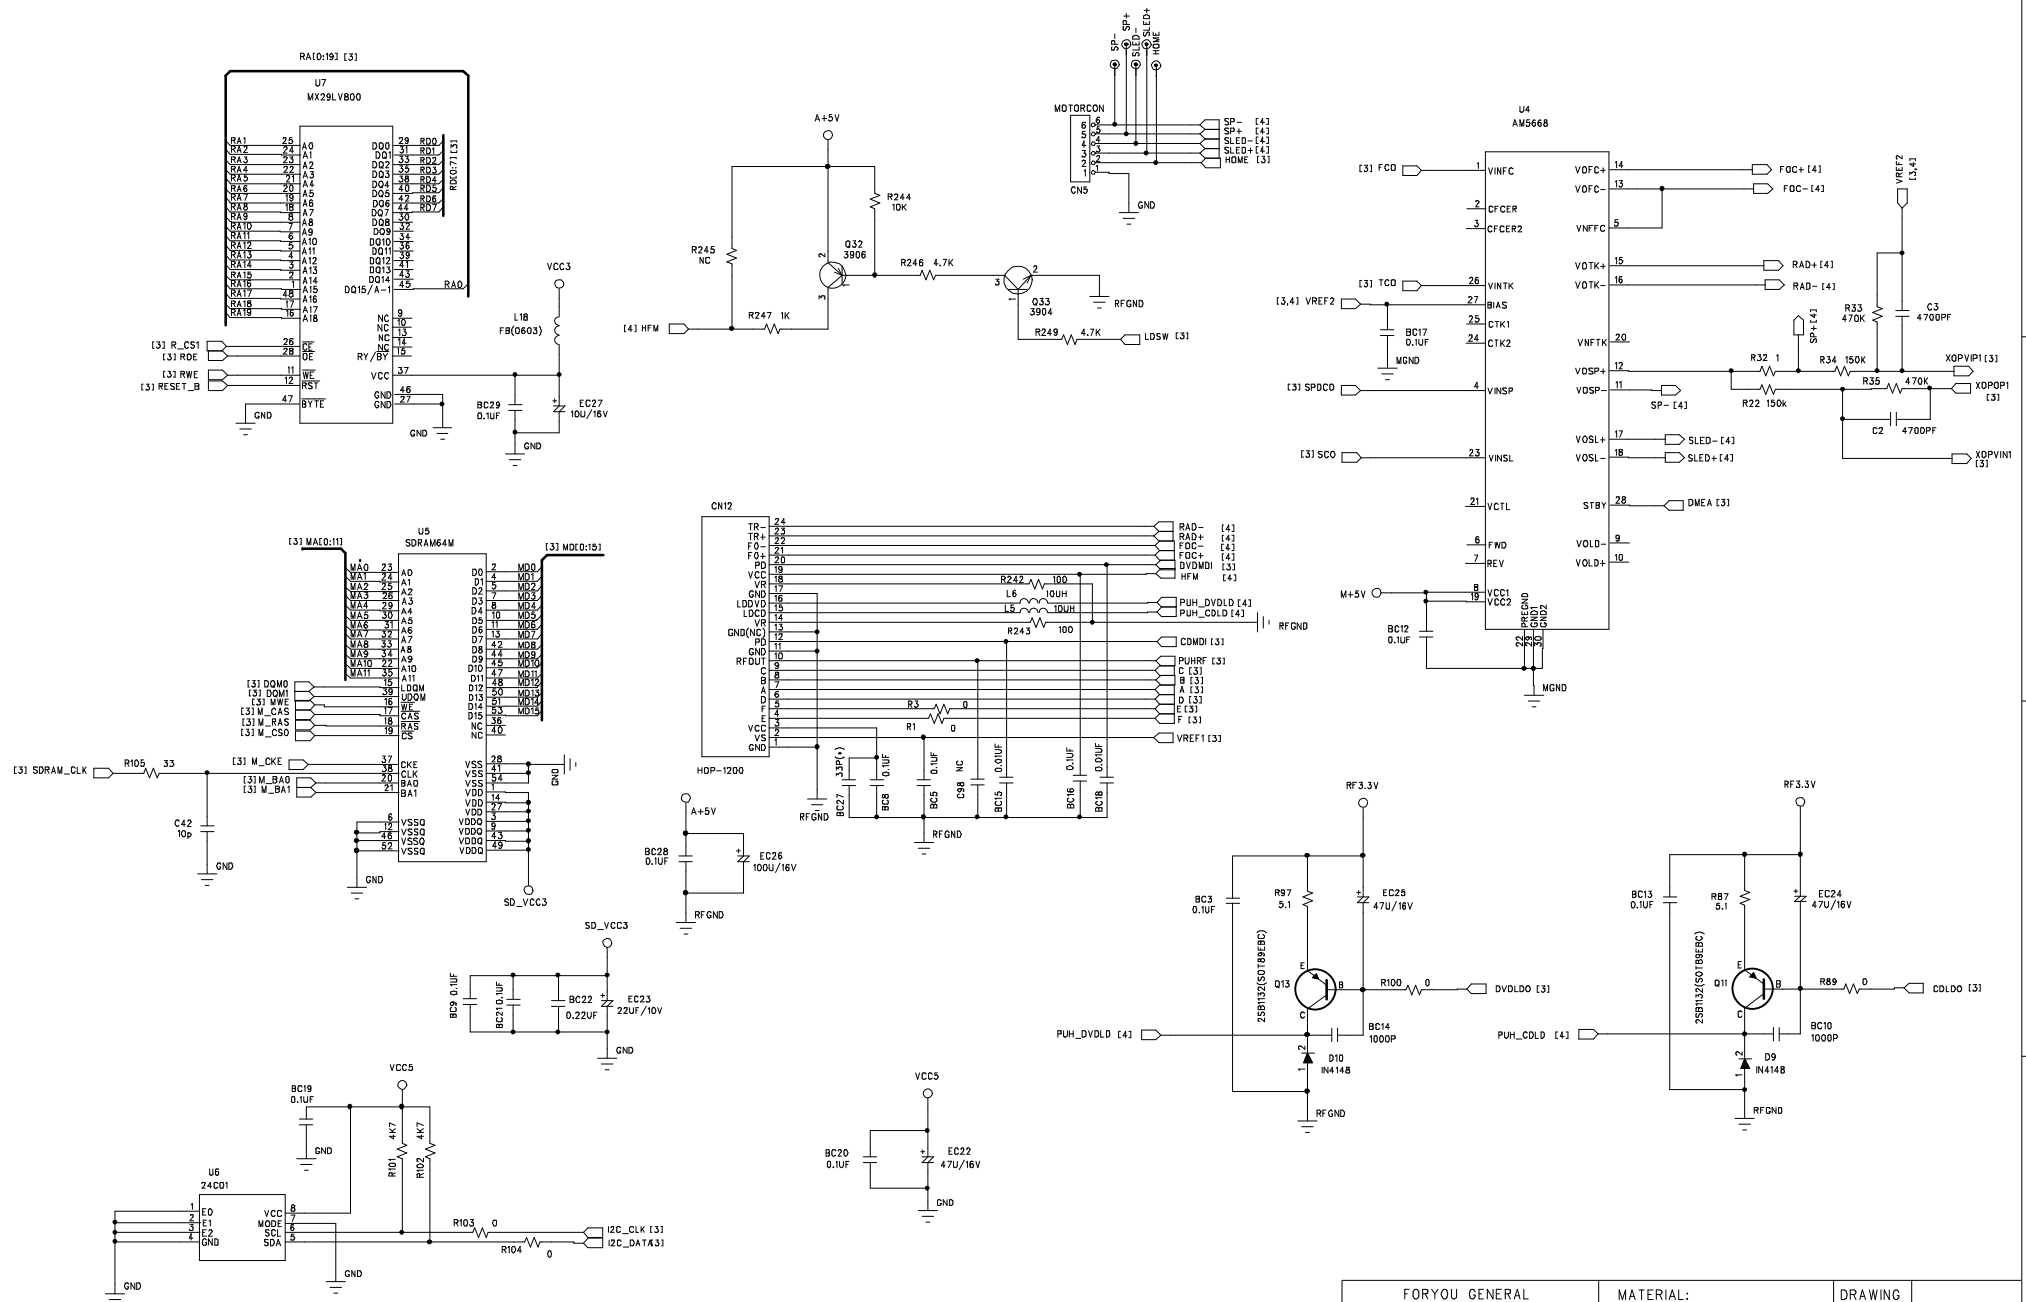

FORYOU GENERAL ELECTRONICS CO., LTD.				MATERIAL: 1.2MM DOUBLE SIDE		DRAWING BY	HUIQIANG
FILE NAME	DVD703E/705E/715E/719E /711E SERIES SB			VERSION	A1.0	CHECKED BY	
BLOCK	PAGE	3/3	DATE			APPROVED BY	



FORYOU GENERAL ELECTRONICS CO., LTD.				MATERIAL: 1.2MM DOUBLE SIDE		DRAWING BY		许小兵	
FILE NAME		DVU722(T1)SD CARD_SCH		VERSION		A		CHECKED BY	
BLOCK		PAGE		1		DATE		APPROVED BY	

Seq.	Part No.	Description	Qty
1	83803DVU722KB010	DVU722-68A Titan Panel 3'TFT LCD RED REM KB MI Assm	1
2	83802DVU722KB010	DVU722 RED KB SMT Assm	1
3	121604000000	RES,0Ω,±5%,1/16W,0603	2
4	121604000101	RES,100Ω,±5%,1/16W,0603	1
5	121604000102	RES,1KΩ,±5%,1/16W,0603	5
6	121604000103	RES,10KΩ,±5%,1/16W,0603	6
7	121604000104	RES,100KΩ,±5%,1/16W,0603	1
8	121604000105	RES,1MΩ,±5%,1/16W,0603	1
9	121604000152	RES,1K5Ω,±5%,1/16W,0603	2
10	121604000180	RES,18Ω,±5%,1/16W,0603	2
11	121604000181	RES,180Ω,±5%,1/16W,0603	1
12	121604000220	RES,22Ω,±5%,1/16W,0603	11
13	121604000221	RES,220Ω,±5%,1/16W,0603	1
14	121604000222	RES,2K2Ω,±5%,1/16W,0603	1
15	121604000272	RES,2K7Ω,±5%,1/16W,0603	1
16	121604000330	RES,0603,33Ω,±5%,1/16W	1
17	121604000331	RES,330Ω,±5%,1/16W,0603	2
18	121604000332	RES,3K3Ω,±5%,1/16W,0603	4
19	121604000391	RES,390Ω,±5%,1/16W,0603	1
20	121604000471	RES,470Ω,±5%,1/16W,0603	2
21	121604000473	RES,47KΩ,±5%,1/16W,0603	4
22	121604000560	RES,56Ω,±5%,1/16W,0603	2
23	121604000681	RES,680Ω,±5%,1/16W,0603	2
24	121803000101	CAP,100pF,±5%,50V,NPO,0603	1
25	121803000104	CAP,0.1μF,+80%-20%,16V,Y5V,0603	14
26	121803000330	CAP,33pF,±5%,50V,NPO,0603	3
27	121803000331	CAP,330pF,±10%,16V,X7R,0603	4
28	121803000681	CAP,680pF,±10%,16V,X7R,0603	2
29	121606000000	RES,0Ω,±5%,1/10W,0805	2
30	121606000681	RES,680Ω,±5%,1/10W,0805	8
31	121803000105	CAP,1μF,+80%, -20%,10V,Y5V,0603	3
32	121806000225	CAP,2.2μF,+80%, -20%,16V,Y5V,0805	5
33	122000000055	INDUCTOR,2.7UH,0805,FERRITE	4
34	121809000106	CAP,10μF,±10%,10V,X5R,1206	6
35	122040000041	CHIP BEAD,0805,2.0X1.2X0.9,200mA,100MHZ,0.40	5
36	122233000021	SCHTTKYDIODE,SB07-03C,CP,SANYO	1
37	122251000020	TR,FMMT618,SOT-23,,NPN	1
38	122410000139	IC,TVP5150AM1,S-PQFP-G32,TI	1
39	143405000069	LED,RED,0603,10mA,2.2V	17
40	123815000149	FPC SOCKET,40PIN,0.5mm,SMT,XJ,DVU722	1
41	122400000504	IC,UTC1117-3.3V,SOT-23,UTC	1
42	142400000505	IC,UTC1117-1.8V,SOT-223,UTC	1
43	123010000448	PCB,KB,DVU722,FR4,1.2mm,171.1X200.3mm,GILDING	1
44	121606000821	RES,820Ω,±5%,1/10W,0805	1
45	123420000010	TFT,A030DL01,3",DVU722(AUO)	1
46	121830040106	E.CAP,10μF,±20%,6.3X5,50V,105°	1
47	141662020003	ENCODER,ECB11(7X5)(PV)S14.5VER.1,V11-SDB0004SZ	1
48	121830020107	E.CAP,100μF,±20%,6.3X5,16V,105°	6
49	122010000002	AXIS INDUCTOR,DRW2X2,33UH,±5%,190mA,62X5X3mm	1
50	122820000038	CRYSTAL,14.31818MHz,±30PPm,-20° +70°,DIP,33PF	1
51	142212010002	PHOTO DIODE,IRM2,638AF4,5V/1.1	1
52	123210000050	TACTSW,4.3mm,TS-03M-AH-A,250GF	15
53	14121040045300	DVU722,PANEL FRONT,ABS,TITAN	1
54	121210300558018	DVU722,PANEL REAR,ABS,GENERAL,BLACK	1
55	121040000184	SCREW,PTP,BLACK Zinc,M2X10	5
56	14123040066400	DVU722,KNOB NUM,PC,TITAN	1
57	14123040066200	DVU722,KNOB DISP-AF-TA,PC,TITAN	1
58	14123040066100	DVU722,KNOB AMS-SRC-BAND,PC,TITAN	1
59	14123040066600	DVU722,KNOB PWR SKIP,PC,TITAN	1
60	14123040066500	DVU722,KNOB OPEN,PC,TITAN	1
61	121035000332	CMV100,SPRING RELEASE NEW,0.3mm,	1
62	141260000004000	DVU722,LIGHT GUIDE,PC	1

63	141290000795008	DVU722,SIDE BLOCK RIGHT,POM,BLACK	1
64	121035000136	CM700,L/&R ROTATING SPRING,φ0.40	1
65	141290300733007	DVU722,COSMETIC,ABS,	1
66	14122080018900	DVU722,LENS,PMMA,BLACK	1
67	121445000103	DVU722,DOUBLE SIDE TAPE,3M,	1
68	121405010006	226,SHADESPONGE	1
69	121235000036	KNOB-VOL FOR CM715	1
70	123800000015	20PIN 2.0mm FLOAT PLUG ESTF2-20T-01 SMD	1
71	123890000074	CONNECTTERGANT,10PIN,DVU722,P=2.54mm,180°	2
72	143000000158	PCB,KB-SB,DVU722,94V0,1.2mm,205.1X170.4mm,colophony	1
73	83803DVU722MB010	2X2V RDS OIRT 2VSUB AUIXN TDA7386 MB MI Assm	1
74	83802DVU722MB010	2X2V RDS OIRT 2VSUB AUIXN MB SMT Assm	1
75	83801DVU722MB010	2X2V RDS OIRT 2VSUB AUIXN MB AI Assm	1
76	143000000157	PCB,MB,DVU722(TI),94V0,1.6mm,194X152.5mm,colophony,	1
77	121640000100	RCF,10Ω,±5%,1/8W	4
78	121640000101	RCF,100Ω,±5%,1/8W	4
79	121640000102	RCF,1KΩ,±5%,1/8W	2
80	121640000103	RCF,10KΩ,±5%,1/8W	10
81	121640000752	RCF,7.5KΩ,±5%,1/8W	1
82	121640000472	RCF,4K7Ω,±5%,1/8W	3
83	121640000473	RCF,47KΩ,±5%,1/8W	7
84	121644000102	RCF,1KΩ,±5%,1/4W	1
85	121646000560	RCF,56Ω,±5%,1/2W	1
86	121650000022	RCF,2Ω2,±5%,2W	4
87	122005000001	STANDINDUCTOR,,DRW2X2,4.7UH,±5%,190mA,62X5X3mm	1
88	142206000004	REC□DIODE□1N4001□1A□1V□50V□DO□41	2
89	142224000001	ZENER□DIODE□10V□1/2W□DO-35	1
90	142224000025	ZENER□DIODE□6V8□1/2W□±5%□1206	1
91	142224000029	ZENER□DIODE□9V1,1/2W□±5%□DO□35	1
92	142203000003	SW□DIODE□1N4148□DO□35	9
93	113850000036	□0.5mm,5.0mm	13
94	113850000039	□0.5mm,6mm	9
95	113850000041	□0.5mm,7mm	12
96	113850000043	□0.5mm,8mm	8
97	113850000045	□0.5mm,9mm	12
98	113850000002	□0.5mm,10mm	8
99	113850000004	□0.5mm,11mm	4
100	113850000006	□0.5mm,12mm	4
101	113850000008	□0.5mm,13mm	8
102	113850000010	□0.5mm,14mm	2
103	113850000012	□0.5mm,15mm	3
104	113850000014	□0.5mm,16mm	5
105	113850000016	□0.5mm,17mm	2
106	113850000018	□0.5mm,18mm	3
107	113850000023	□0.5mm,21mm	1
108	113850000025	□0.5mm,22mm	1
109	113850000026	□0.5mm,23mm	2
110	113850000029	□0.5mm,25mm	2
111	113850000030	□0.5mm,26mm	3
112	113827000001	□0.5mm,29mm	2
113	121640000222	RCF,2K2Ω,±5%,1/8W	4
114	121604000000	RES,0Ω,±5%,1/16W,0603	5
115	121604000068	RES,6.8Ω,±5%,1/16W,0603	1
116	121604000101	RES,100Ω,±5%,1/16W,0603	22
117	121604000102	RES,1KΩ,±5%,1/16W,0603	13
118	121604000103	RES,10KΩ,±5%,1/16W,0603	29
119	121604000104	RES,100KΩ,±5%,1/16W,0603	7
120	121604000123	RES,12KΩ,±5%,1/16W,0603	2
121	121604000153	RES,15KΩ,±5%,1/16W,0603	3
122	121604000221	RES,220Ω,±5%,1/16W,0603	1
123	121604000223	RES,22KΩ,±5%,1/16W,0603	1

124	121604000332	RES,3K3Ω,±5%,1/16W,0603	8
125	121803000221	CAP,220pF,±10%,50V,NPO ,0603	6
126	121604000394	RES,390KΩ,±5%,1/16W,0603	4
127	121604000471	RES,470Ω,±5%,1/16W,0603	1
128	121604000472	RES,4K7Ω,±5%,1/16W,0603	6
129	121604000473	RES,47KΩ,±5%,1/16W,0603	8
130	121606000473	RES,47KΩ,±5%,1/10W,0805	1
131	121604000474	RES,470KΩ,±5%,1/16W,0603	1
132	121604000562	RES,5K6Ω,±5%,1/16W,0603	5
133	121604000682	RES,6.8KΩ,±5%,1/16W,0603	4
134	121604000750	RES,75Ω,±5%,1/16W,0603	2
135	121604000752	RES,7K5Ω,±5%,1/16W,0603	8
136	121803000101	CAP,100pF,±5%,50V,NPO,0603	1
137	121803000102	CAP,1nF,±10%,16V,X7R,0603	1
138	121803000104	CAP,0.1μF,+80%-20%,16V,Y5V,0603	27
139	121803000123	CAP,0.012μF,±20%,50V,Y5V,0603	1
140	121803000153	CAP,0.015μF,±10%,50V,X7R,0603	2
141	121803000220	CAP,22pF,±5%,50V,NPO,0603	2
142	121803000223	CAP,0.022μF,±10%,50V,X7R,0603	3
143	121803000330	CAP,33pF,±5%,50V,NPO,0603	2
144	121803000332	CAP,3300pF,±10%,50V,X7R,0603	1
145	121803000561	CAP,560pF,±10%,16V,X7R,0603	1
146	121803000682	CAP,6800pF,±10%,50V,X7R,0603	2
147	121606000681	RES,680Ω,±5% ,1/10W,0805	1
148	121806000225	CAP,2.2μF,+80%,-20%,16V,Y5V,0805	5
149	122000000028	INDUCTOR,10UH,0805,	1
150	121809000106	CAP,10μF,±10%,10V,X5R,1206	2
151	142206000020	SW□DIODE□1N4148□25□A.0.9V□100V□MINI-MELF	1
152	142245000015	TR□DTC343TK□SOT□23	6
153	142245000048	TR,MMBT3906LT1,SOT-23,PNP	9
154	142400000080	IC,AP1507-5V,TO252-5L,ANACHIP	1
155	142400000416	IC,UTC4558,SOP-8,UTC	3
156	142251000001	TR□2N3904□NPN□□SOT□23	8
157	142290000003	ESD□DIODE□PG05GBUSV□24A□200W□5G	3
158	142400000276	IC,NJM2267M,NJRC	1
159	142400000384	IC,TDA7419,SO-28,ST	1
160	142400000388	IC,TDA7478D,SO 16,ST	1
161	122005010012	STAND INDUCTOR DR8×10,220UH,±10%,500mA,13X10mm(H×D)	1
162	121650000022	RCF,2Ω2,±5%,2W	1
163	121670000109	PTC,GBX050	1
164	121830000105	E.CAP,1μF,±20%,4X5,50V,105□	5
165	121830020107	E.CAP,100μF,±20%,6.3X5,16V,105□	19
166	121830000226	E.CAP,22μF,±20%,4X5,16V,105□	3
167	121830000225	E.CAP,2.2μF,±20%,4X5,50V,105□	16
168	121830000474	E.CAP,0.47μF,±20%,4X5,50V,105□	1
169	121830040106	E.CAP,10μF,±20%,6.3X5,50V,105°	6
170	121830040476	E.CAP,47μF,±20%,5X5,16V,105□	3
171	121842030108	E.CAP,1000μF,±20%,8X12,10V,105□	1
172	121842030338	E.CAP,3300μF,±20%,13X26,16V,105°	1
173	122005000010	STAND INDUCTOR DR4X10,150UH,±10%,500mA,62X15X6mm	1
174	122206000006	REC DIODE,1N5401,3A,1V,100V,DO-27,HY	1
175	122257000001	TR,2SB1243TV2Q(PNP),ATV	1
176	122400000218	IC,LM2950-5V,TO-92,HTC	1
177	122400000466	IC,KIA78R05API,TO-220IS-4,KEC	1
178	142400000380	IC,TDA7386,FLEXIWATT25,ST	1
179	122820000026	CRYSTAL,8.664MHZ,±30ppm,-20□~+70□,CL=30pF,HC-49/US	1
180	122820000030	CRYSTAL,4.332MHZ,±30PPm,-20□ +70□,DIP W/32PF W/32PF	1
181	123800000023	2PIN,SOCKET 2.0mm DIP 180°	1
182	123805000102	7PIN,CONNECT,2.0mm,90°	1
183	123805000101	7PIN,2.0mm,WAFER DIP 180°	1
184	123825000080	21PIN,1.0mm,90°	1

185	123830010086	CM700,20PIN,PWR/SPK EST-KNT-20-04	1
186	124845000001	ANTENNA,W/GROUND 230mm	1
187	122206000008	REC DIODE,1N5822,3A,0.9V,40V,DO-27	1
188	122254000011	TR,BD435S(NPN),TO-126	2
189	122400000042	IC,78L09,SOT-89,KEC	1
190	143825000190	CONNECTOR,20PIN,1.0mm,CONNECTOR FZC6A-020	1
191	124815000046	TUNER,TC-512,FM/AM/OIRT TUNER WITH RDS	1
192	141000000319	CM226,BRACKET IC 7386,SECC,T0.8	1
193	123825000460	WIRE,2PIN,AWG28#,80mm,WHITE/BLACK	1
194	133000010010	PCB,CB,CM206,94-V0,36×30×1.6mm	1
195	122015000014	CHOKE COIL,470UH,1A,±30%,26mm(D)X10mm(L)X14mm(H)(CM206)	1
196	124800000025	FUSE,ZH270,15A,SLOW FUSE TYPE	1
197	83803DVU722SB010	DVU722 DIVX□□ SB MI Assm	1
198	83802DVU722SB010	DVU722 DIVX□□ SB SMT Assm	1
199	121604000000	RES,0Ω,±5%,1/16W,0603	6
200	121604000100	RES,10Ω,±5%,1/16W,0603	2
201	121604000101	RES,100Ω,±5%,1/16W,0603	3
202	121604010102	RES,1kΩ,±1%,1/16W,0603	4
203	121604000103	RES,10KΩ,±5%,1/16W,0603	9
204	121604000332	RES,3K3Ω,±5%,1/16W,0603	4
205	121604010122	RES,1K2Ω,±1%,1/16W,0603	1
206	121604000152	RES,1K5Ω,±5%,1/16W,0603	1
207	121604000153	RES,15KΩ,±5%,1/16W,0603	4
208	121604000154	RES,150KΩ,±5%,1/16W,0603	2
209	121604000010	RES,1Ω,±5%,1/16W,0603	1
210	121604000393	RES,39KΩ,±5%,1/16W,0603	1
211	121604000203	RES,20KΩ,±5%,1/16W,0603	1
212	121604000220	RES,22Ω,±5%,1/16W,0603	2
213	121604000330	RES,0603,33Ω,±5%,1/16W	1
214	121604000333	RES,33KΩ,±5%,1/16W,0603	1
215	121604000391	RES,390Ω,±5%,1/16W,0603	1
216	121604000433	RES,43KΩ,±5%,1/16W,0603	1
217	121604000047	RES,4Ω7,±5%,1/16W,0603	2
218	121604000472	RES,4K7Ω,±5%,1/16W,0603	11
219	121604000474	RES,470KΩ,±5%,1/16W,0603	3
220	121604000512	RES,5K1Ω,±5%,1/16W,0603	2
221	121604000750	RES,75Ω,±5%,1/16W,0603	1
222	121604000022	RES,2Ω2,±5%,1/16W,0603	2
223	121606000330	RES,33Ω,±5%,1/10W,0805	1
224	121618000103	RES,10KΩ,4,±5%, 1/16W,0603	1
225	121803000100	CAP,10pF,±1%,50V,NPO,0603	2
226	121803000101	CAP,100pF,±5%,50V,NPO,0603	3
227	121803000102	CAP,1nF,±10%,16V,X7R,0603	9
228	121803000103	CAP,0.01μF,±10%,50V,X7R,0603	6
229	121803000104	CAP,0.1μF,+80%-20%,16V,Y5V,0603	53
230	121803040105	CAP,1uF,±10%,25V,X5R,0603	5
231	121803010221	CAP,220pF,±5%,25V,NPO,0603	2
232	121803000152	CAP,1500pF,±10%,50V,X7R,0603	2
233	121803010224	CAP,0.22μF,±10%,25V,X7R,0603	1
234	121803010301	CAP,300pF,±5%,50V,NPO,0603	1
235	121803000330	CAP,33pF,±5%,50V,NPO,0603	6
236	121803010331	CAP,0603,330p,16V,±5%,NPO	1
237	121803000470	CAP,47pF,±5%,16V,NPO,0603	2
238	121803000472	CAP,4700pF,±10%,50V,X7R,0603	2
239	121803000473	CAP,0.047μF,±10%,50V,X7R,0603	1
240	121803000681	CAP,680pF,±10%,16V,X7R,0603	5
241	121803000683	CAP,0.068μF,±10%,50V,X7R,0603	1
242	121803000821	CAP,0603,820pf,±10%,16V,X7R	1
243	121845090107	TAN.CAP,100μF,±20%,6.3V,C	6
244	122000000179	INDUCTOR,1.8μH,±10%,50MA,0805	1
245	122040000011	CHIP BEAD,0603,1.6X0.8X0.8,800mA,100MHZ,0.6	20

246	122040000061	CHIP BEAD,120Ω,L2XW1.25XT1.25XA0.5,3A,100MHZ,DCR17Ω	3
247	122040000042	CHIP BEAD,0805,2.0X1.2X0.9X0.5,200mA,100MHZ,0.40Ω	5
248	142206000020	SW□DIODE□1N4148□25□A.0.9V□100V□MINI-MELF	6
249	142251000001	TR□2N3904□NPN□□SOT□23	1
250	142245000048	TR,MMBT3906LT1,SOT-23,PNP	1
251	142251000005	TR,2SB1132,SOT-89	2
252	142400000541	IC,AT24C02,SOP-8	1
253	142400000416	IC,UTC4558,SOP-8,UTC	1
254	142400000108	IC,BA6287F,SOP-8,ROMH	1
255	142400000504	IC,UTC1117-3.3V,SOT-23,UTC	1
256	142400000505	IC,UTC1117-1.8V,SOT-223,UTC	1
257	142400000179	IC,IS42S16400A,TSOPII-54,ISSI	1
258	122410000087	IC,SPHE8281D-216PIN,LQFP-216,SUNPLUS	1
259	123800000018	24PIN,0.5mm,FPC SOCKET SMT TYPE TOP CONNECT TYPE	1
260	143010000486	PCB,SB,DVU722E,FR4,1.2mm,107X109mm,OSP,(SUNPLUS)	1
261	121604000223	RES,22KΩ,±5%,1/16W,0603	1
262	121604000562	RES,5K6Ω,±5%,1/16W,0603	3
263	121604000473	RES,47KΩ,±5%,1/16W,0603	1
264	121606000000	RES,0Ω,±5%,1/10W,0805	1
265	142266000004	MOSFET,A03401,SOT-23	1
266	123815000017	FFC CON,12PIN,1.0mm,UPPER CONTACT	1
267	142245000015	TR□DTC343TK□SOT□23	1
268	142224000023	ZENER□DIODE□5V6□MINI□MELF	1
269	121803000225	CAP,2.2μF,+80%,-20%,10V,Y5V,0603	2
270	121803010272	CAP,2700PF,±5%,50V,X7R,0603	2
271	142410000024	IC,AM5668S,HSOP28,AMTEK	1
272	144840000018	DECD,DL-C28D1(SHINWA)	1
273	143820000147	FFC,12PIN,1.00mm,160mm,TYPE"B"	1
274	121827050227	CAP,220μF,±20%,6.3X7,10V,-55□--105□	1
275	121830020106	E.CAP,10μF,±20%,4X5.5,16V,85□	4
276	121830020107	E.CAP,100μF,±20%,6.3X5,16V,105□	14
277	121830040476	E.CAP,47μF,±20%,5X5,16V,105□	3
278	143405000004	INFRARED RECEIVER,IR928-6C	2
279	142820000010	CRYSTAL,27.000MHZ,±20ppm,-30□~+80□,CL=18pF,HC-49/US	1
280	143210000004	DETECT SW,SW111	1
281	127070010965	CMV100,LASER WARNING LABEL	1
282	142400000040	IC,78L05,TO-92,UTC/ST/KEC	1
283	123830000117	CMV700,2PIN,PI=2.0mm 135mm(SOCKET PIN)	1
284	121830000226	E.CAP,22μF,±20%,4X5,16V,105□	2
285	123820000194	FFC,21PIN,1.0MM,120MM,E#	1
286	142206000004	REC□DIODE□1N4001□1A□1V□50V□DO□41	1
287	121435000050	WASHER,Φ5.3XΦ2.6X1mm,DVD120	2
288	121040000044	SCREW,BM,White Ni,M2.0X7	2
289	121040000186	SCREW,PTS,Color Znic,M2.0X4	1
290	121405000004	206,SPONGE FOR FPC	1
291	83803DVU722SA010	DVU722 USB/SD (DVU722-68A)SA MI Assm	1
292	81803DVU722SD000	DVU722 SD MI Assm	1
293	81802DVU722SD000	DVU722 SD SMT Assm	1
294	142251000001	TR□2N3904□NPN□□SOT□23	2
295	142245000048	TR,MMBT3906LT1,SOT-23,PNP	1
296	122040000042	CHIP BEAD,0805,2.0X1.2X0.9X0.5,200mA,100MHZ,0.40Ω	1
297	121604000273	RES,27KΩ,±5%,1/16W,0603	6
298	121604000562	RES,5K6Ω,±5%,1/16W,0603	1
299	143890000071	SD/MMC SOCKET,CMU706	1
300	123010000454	PCB,SD,DVU722(TI),FR4,1.6mm,247.2X217.7mm,GILDING,	1
301	121604000103	RES,10KΩ,±5%,1/16W,0603	2
302	121604000223	RES,22KΩ,±5%,1/16W,0603	5
303	121604000333	RES,33KΩ,±5%,1/16W,0603	1

304	121803000104	CAP,0.1μF,+80%-20%,16V,Y5V,0603	1
305	121809000106	CAP,10μF,±10%,10V,X5R,1206	1
306	121604000121	RES,120Ω,±5%,1/16W,0603	1
307	121604000222	RES,2K2Ω,±5%,1/16W,0603	1
308	121604000431	RES,430Ω,±5%,1/16W,0603	1
309	121606000221	RES,220Ω,±5%,1/10W,0805	1
310	142206000020	SW□DIODE□1N4148□25□A.0.9V□100V□MINI-MELF	1
311	142245000024	TR□KTC8550S□PNP□□SOT-23	1
312	142400000414	IC,UTC1117,ADJSOT-223,	1
313	121845040226	TAN.CAP,22μF,±20%,6.3V,A	3
314	142400000227	IC,LM7805,D-PAK,FAIRCHILD	1
315	123805000011	CONNECTOR,12PIN,1.0mm,90°	1
316	142206000004	REC□DIODE□1N4001□1A□1V□50V□DO□41	1
317	123800000097	SOCKET,10PIN,2.5mm,,CONNETOR 90°	1
318	121435000050	WASHER,Φ5.3XΦ2.6X1mm,DVD120	2
319	81803DVU722LB000	DVU722 LB MI Assm	1
320	123000000159	PCB,LB,DVU722,94V0,1.6mm,224.1X397.6mm,colophony	1
321	123825000118	BAR CON.,7PIN,AWG28#,90mm,GRAY	1
322	121644000102	RCF,1KΩ,±5%,1/4W	1
323	123405000044	LED□RED□φ3,3R4SD□20□A□2V	2
324	123210000013	TACTSW,DP1130X	1
325	123210000027	TACT SW,TS-06V-ASM	1
326	123210000056	TACTSW,TS-04V-BSM,SWITCA	1
327	81803DVU722CB000	DVU722 CB MI Assm	1
328	123010000388	CB,DVU722,FR4,1.6mm,152.4X217.6mm	1
329	123820000146	FFC,20PIN,P=1.0mm,L=70mm,TYPE“E/C”	1
330	123805000027	20PIN,2.0mm,FLOAT SOCKET ESTF2-20A-01,DIP 180°	1
331	121240300312018	DVU722,CABINET WITH SD,ABS,GENERAL,BLACK	1
332	141298000064	LOCKET,POM,CM725	1
333	141290000667	INDICATOR,PC,CM725	1
334	141238000449	KNOB EJECT,PC,CM725	1
335	121200000087	CMU706,DAMPER(45g), NYLON	1
336	141200010082	CM700,GEAR ,POM	1
337	141290000794008	DVU722,HAND SPIKE,POM,BLACK	1
338	121405000032	CM700,LCD STOPPER(EVA)	1
339	121450000071	CM700S,DUSTPROOF,	1
340	121440000031	CD206,FELT-16-025,φ3.5Xφ1.5X0.25,Graphite fibre	1
341	121035000355	DVU722,SPRING FOR HAND SPIKE,SUS304,0.55mm	1
342	141240000314008	DVU722,PANEL RIGHT BRACKET,POM,BLACK	1
343	141000000903	DVU722,BRACKE DAMPER,SECC,T=1.0mm,	1
344	121025010154	CM700,RIVET GEAR	1
345	121025010155	CM700,RIVET PANEL	1
346	121040000185	SCREW,PTP,BLACK Zinc,M2X5	7
347	121040000083	SCREW,BTS,White Ni,M2.6X5	2
348	121040000089	SCREW,BTS,BLACK Zinc,M2.6X10.0	1
349	121040000105	SCREW,CTS,Zincification,M2X4	1
350	141000000905	DVU722,BRACKET FRONT U,SECC,T=1.0mm	1
351	83803RC40000090	REM-PET PANEL DVD715 68A HYUNDAI	1
352	83803RC400RM000	RC400 REMOTE(□□)	1
353	83802RC400RM000	RC400 RMT SMT Assm	1
354	83801RC400RM000	RC400 REM A/I Assm	1
355	142400000334	IC,SC6122,SOP-24,SL	1
356	133010010322	PCB PD710B REM S/S 94V0 104X42X1.0MM	1
357	121606000022	RES,2R2Ω,±5%,1/10W,0805	1
358	121806010101	CAP,100pF,±5%,50V,NPO,0805	2
359	142245000028	TR□S8050□NPN□□SOT-23	1
360	142206000020	SW□DIODE□1N4148□25□A.0.9V□100V□MINI-MELF	1
361	121606000104	RES,100KΩ,±5%,1/10W,0805	1
362	121830030476	E.CAP,47μ F,±20%,4X5,10V,85□	1
363	143405000006	INFRARED TRANSMITTER,φ3	1
364	121040000108	SCREW,FA,BLACK Zinc,M1.7X4	5
365	121090010014	203,METAL BATTERY FLAKE+ CR2025	1
366	121090000015	203,METAL BATTERY FLAKE-CR2025	1

367	122890000001	CER OSC,455KHz,-20□ +80□,CL=100pF,ZTB455E	1
368	141290010505	RMT400,REMBOTTOMCOVER	1
369	141290000504	RMT400,BATTERY COVER	1
370	124810000003	BATTERY,CR2025,3.0V,	1
371	121465010135	DVD715-68A,REMOTE PANEL,PET,(HYUNDAI)	1
372	127070000218	CAD415,PASS LABEL(REM)	1
373	121460000163	RC400,INSULATING SHEET,PC,T0.1	1
374	123830000074	CM206,20PIN,PWR/SPK 2RCA A4/7CHANGE	1
375	123835000183	DVU722,15PIN,USB/AUX/SUB/V OUT/V IN/CAMEKA IN/RE IN	1
376	121000000909	CM725,BTACKET REAR U,SECC,1.0mm,	1
377	121000000778	DVD703S,BRACKET REAR DECK,SECC,1.0mm	1
378	121000000904	DVU722,BRACKET DECK FRONT,SECC,T=1.0mm,	1
379	121000000866	CM725,TOP COVER,SECC,0.6mm	2
380	121290000662	CM725,ISOLATOR SHEET,PC SHEET(T=0.185mm),CM725	1
381	121000040316	CM216,SHORTSHEET,SECC,T0.5	1
382	141010010040	CME0CA-D310,HEATSINK	1
383	14129040070800	DVU722,RIM,ABS,TITAN	1
384	127025020001	BROWN CD101,B=B,280X218X90	1
385	127015000031	DVU722,paper,277X84X32mm,	2
386	127060000020	CMV100,POLY BAG RIM,	1
387	127060000023	CMV100,POLY BAG SIDE LOCK,	1
388	127060000019	CMV100,POLY BAG MANUAL,	1
389	127060020025	CMV100,POLY BAG UNIT,	1
390	127060000021	CMV100,POLY BAG SCREW,	4
391	121040000049	SCREW,BM,White Ni,M4.0X6	4
392	121040000051	SCREW,BM,White Ni,M5.0X6	4
393	121050000003	CMV100,POLE	1
394	121410000026	CMV100,RUBBER	1
395	127070080803	CM702,SERIAL NO.LABEL,HYUNDAI	3
396	141090000068	CMV100,SIDE-LOCK(NEW)	2
397	121040000047	SCREW,BM,White Ni,M3X8	2
398	121050000005	MUT,White Znic,M3X2.5	2
399	121040000154	SCREW,PA ,White Ni,M2.6X8	2
400	121040000086	SCREW,BTS,White Ni,M2.6X7	3
401	121040000077	SCREW,BTS,White Ni,M2.6X14	2
402	121040000059	SCREW,BTB,White Ni,M2.6X21	2
403	121040000075	SCREW,BTS,White Ni,M2.6X10	1
404	121040000069	SCREW,BTS,White Znic,M2.6X3	2
405	121040000083	SCREW,BTS,White Ni,M2.6X5	13
406	127070000427	CM110 ,QC PASS LABLE	1
407	127070000802	CM702,SCREW LABEL(HYUNDAI)	1
408	127020000762	GIFT BOX,DVU722E-68A,292X226X95mm,HYUNDAI	1
409	121405000079	DVU722,SPONGE FOR PANEL BOX,BLACK	2
410	121250000073028	DVU722E-68A,PANEL BOX,PP,BLACK,HYUNDAI	1
411	83806DVD705EIC010	DVD705E FLASH IC Assm	1
412	142400000548	IC,MX29LV800CBTC-70,TSOP-48	1
413	83806DVU722IC010	DVU722 OTP IC Assm	1
414	142400000355	IC,ST72F321AR9TA,TQFP64,10X10,ST	1
415	127070002185	DVU722,E-MARK LABEL	2
416	127070002211	DVU722E-68A,BARCODE LABEL FOR GIFT BOX,HYUNDAI	1
417	127070002212	DVU722E-68A,BARCODE LABEL FOR CARTON,,HYUNDAI	1/6
418	127070100420	CM110,CUSTOME RINS TRUCTION MANUAL,HYUNDAI	1
419	127070060430	CM110,WARRANTYCARD(HYUNDEAI)	1
420	127070002209	DVU722E-68A,MODEL LABEL,,HYUNDAI	1
421	127075000985	DVU722E-68A,MANUAL,HYUNDAI	1
422	127000000768	CARTON,DVU722E-68A,K=K,595X310X240mm,HYUNDAI	1/6